




Z1860
INDUSTRIAL TRAP DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

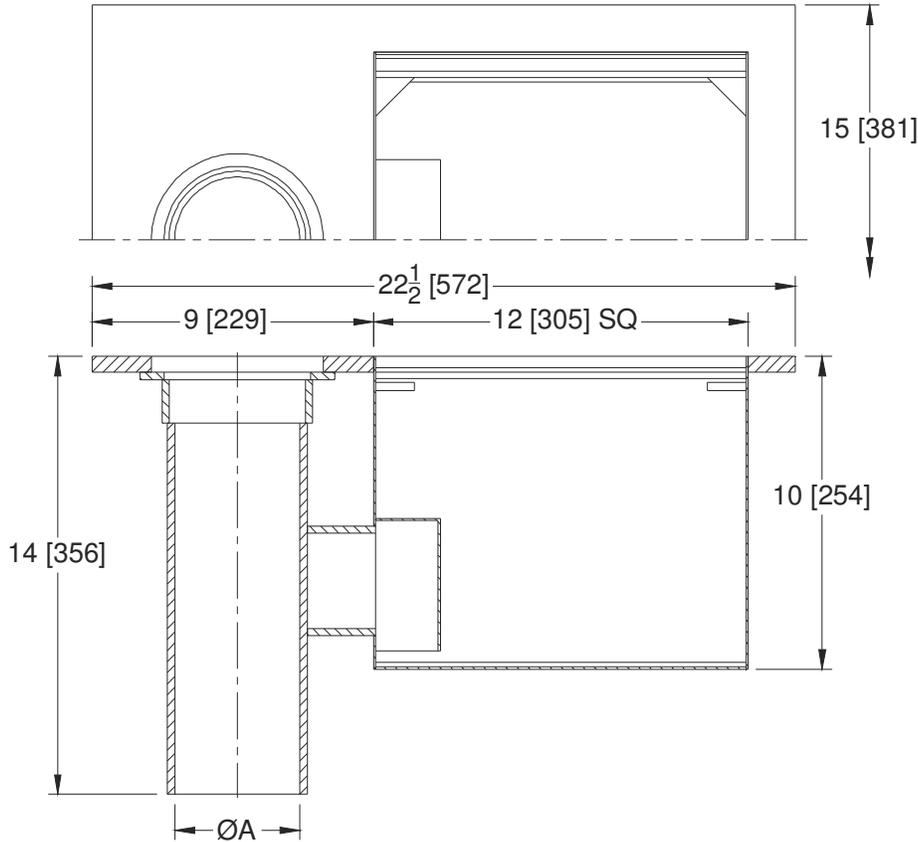

Approx. Wt. Lbs. [kg]
54 [24]

Engineering Specification: Z1860

10" [254] Deep, 12 gauge, type 304 stainless steel, trap floor drain features loose set heavy-duty slotted grate (1/2 [13] thick plate), 9/16 [14] top frame, perforated removable sediment bucket with lift handle, and bead blasted finish. Trap drains manufactured to capture debris and gases passing through drain systems to prevent clogging and maximize flow. Drain meets U.S. FDA standards for corrosion resistance.

Options (Check/specify appropriate options)

Pipe Size (ØA) (Specify size/type) **Outlet**
 3-4 [76-102] ___ BW Butt-Weld
 3-4 [76-102] ___ NH No-Hub

Prefixes

___ Z Type 304 (CF8) Stainless Steel*
 ___ ZM Type 316 (CF8M) Stainless Steel

Suffixes

___ -A Adjustable Threaded Outlet
 ___ -BF Butterfly Lock Sediment Basket
 ___ -K Anchor Flange
 ___ -KC Anchor Flange w/ Seepage Holes and Clamp Collar
 ___ -MG EZLock Magnetic Sediment Basket
 ___ -P 1/2 [13] Trap Primer Connection

* Regularly furnished unless otherwise specified.