## **How To Specify a Floor Drain**

## Note:

To specify a floor drain, use the appropriate Specification Sheet for the model number desired. The Specification Sheet lists the standard range of product variations, such as available materials, connection sizes & types, standard accessories, etc. and their proper designations for use in ordering/specifying.


## **Procedure:**

For example, to specify a Z505 floor drain with the following features:

Nickel Bronze Top (**ZN** per spec sheet) Heel-Proof Grate (**HP** per spec sheet) Sediment Bucket (**Y** per spec sheet) Trap Primer Connection (**P** per spec sheet) 3" No-Hub outlet connection (**3NH** per spec sheet) Backwater Valve (**V** per spec sheet) Vandal-Proof Secured Top (**VP** per spec sheet)

The roof drain would be specified as follows:

The breakdown would be:

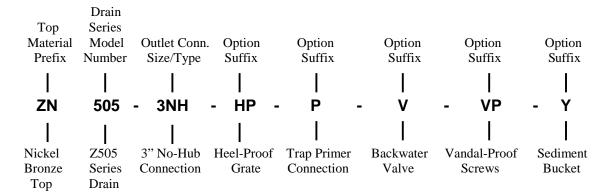

## **Notes:**

- 1. Normally, use of the "Z" prefix alone will specify a floor drain of the standard top construction shown on the Specification Sheet for the particular model drain. Some drain models require the addition of the Top Material Prefix to specify the choice between two available standard top materials. Refer to the Prefixes section of the Specification Sheet for available top materials and their prefixes. If a bronze, nickel bronze, etc. finish top is desired, the corresponding Top Material Prefix (ZB, ZN, etc.) must be used in the model number.
- 2. Dashes are used to separate the Outlet Size/Type designation and the Option Suffix letters. Note that there is **no** dash between the Top Material Prefix and Drain Series Model Number.
- 3. Note that Option Suffixes (HP, P, V, VP, Y) are listed alphabetically. This is the preferred method.