


TYPICAL INSTALLATIONS

TYPICAL SANI-FLOR RECEPTOR INSTALLED IN CONCRETE ZN1900-KC-P (with Z1023 Trap Primer Connection)

Installed in a concrete floor where a waterproofing membrane is used. When -KC option (see Page 4) is specified, the floor receptor is provided with an anchor flange and seepage holes for drainage of water, which may seep onto the membrane. Drain is supplied with clamp collar, which bolts to the pan for securing the waterproofing membrane. Sani-Flor Receptor is pictured with a nickel bronze frame and grate.

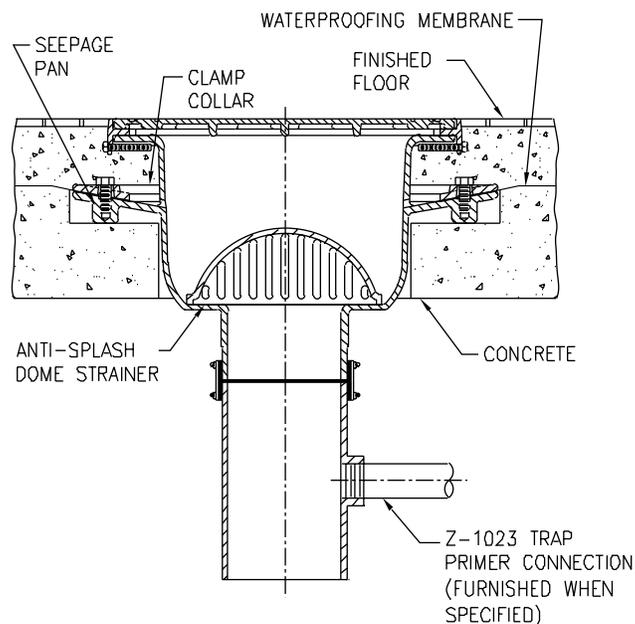

SANI-FLOR CAN WASH DRAIN Z1982

The Z1982 Can Wash Drain provides a 3 to 6 GPM controlled spray to efficiently clean refuse containers. Unit has a 1/2" NPT pipe connection for either hot, cold, or mixed water supply, leading to a chrome-plated bronze spray head for long life. A Zurn Z1464 water supply control box is recommended for easy access to water controls and key lock ensures authorized use only.

