NOTES:

FOR GRAVITY APPLICATIONS ONLY.
 ALL PROCEPTOR UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL

FIBERGLASS REINFORCED PLASTICS. PHYSICAL
CHARACTERISTICS AND THICKNESS:
POLYESTER RESIN AND E GLASS
MINIMUM THICKNESS 1/4" WALL AND 3/8" TOP AND BOTTOM BOWLS.

3. ALL PROCEPTOR UNITS ARE TO BE INSTALLED IN ACCORDANCE
WITH THE MANUFACTURER'S INSTALLATION INSTRUCTION.

4. STANDARD PIPING IS SCH. 40 PVC.

5. GMC/OMC 500 - 3000 UNITS COME STANDARD WITH 4" INLET AND
OUTLET (OTHER PIPE SIZE OPTIONS AVAILABLE ON REQUEST).


6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE,
CULT ON SITE EOD EINAL AD INSTMENT AND COLLIVED WITH CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH


SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL 7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING,


PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.

8. CONSULT GREEN TURTLE FOR OTHER SIZES.
9. LIFETIME WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE

DUE TO MANUFACTURING DEFECTS.



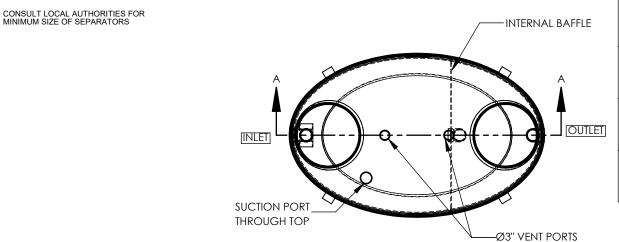

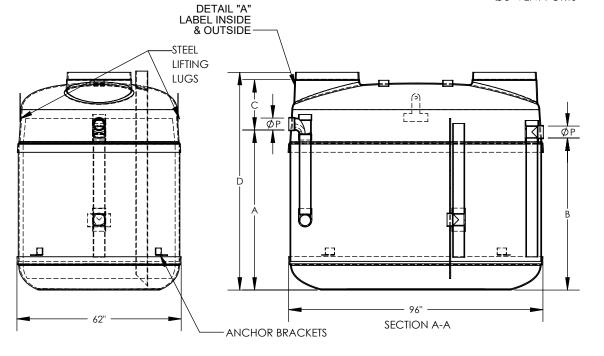

PROCEPTOR GMC NOMINAL TANK DIMENSIONS (INCHES)								
MODEL SIZE (CAPACITY US GAL) "XX"	GREASE CAPACITY (US GAL)	SOLIDS CAPACITY (US GAL)	PIPE SIZE (P)	INLET (A)	OUTLET (B)	BURIAL (C)	HEIGHT (D)	SKU
GMC 500 UPC	279	125	4	33	30	18	55	20011001
			6	33	30	18	55	20011101
			8	33	30	18	55	20011201
GMC 750 UPC	521	125	4	46	43	18	68	20111001
			6	46	43	18	68	20111101
			8	46	43	18	68	20111201
GMC 1000 UPC	782	125	4	60	57	18	82	20211001
			6	60	57	18	82	20211101
			8	60	57	18	81	20211201
GMC 1300 UPC	1061	125	4	75	72	18	97	20411001
			6	75	72	18	97	20411101
			8	75	72	18	97	20411201
GMC 1500 UPC	1247	125	4	83	80	15	101*	20511001
			6	83	80	15	101*	20511101
			8	83	80	15	101*	20511201
GMC 2000 UPC	1712	125	4	110	107	18	132	20611001
			6	110	107	18	132	20611101
			8	110	107	18	132	20611201
					-			



DRAWING NOT TO SCALE | DWG #: 19-4898-S REV. 3