# Urinal Z5755.095.00

#### TAG \_

#### Z6003AV-WS1

Exposed AguaVantage 1.0 gpf **Urinal Flush Valve** AquaVantage 'AV' **Exposed Urinal Flush** Valve Exposed, quiet diaphragm-type, chrome-plated flushometer valve with a polished exterior. Complete with Zurn AquaVantage TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve is ADA compliant with a nonhold open and no-leak handle feature, high



back pressure vacuum breaker, one-piece hex coupling nut, adjustable tailpiece, spud coupling, and flange for top spud connection. Control stop has internal siphonguard protection, vandal-resistant stop cap, sweat solder kit, and a cast wall flange with setscrew. Internal seals are made of chloramine resistant materials.


### **Urinal with Flush Valve**

## Z5755-U



**ZURN**.

Vitreous china, 0.125 gpf [0.5 Lpf] to 1.0 gpf [3.8 Lpf], wall hung, washdown urinal complete with asymmetric backwall resulting in reduced splash back, high efficiency washdown flushing action, oversized footprint to make retrofit easy, 3/4" top spud, 2" I.P.S. outlet flange and rubber gasket with integral trap, 14" extended rim for handicap compliance when installed at proper height, vandal resistant outlet strainer included, and concealed universal retrofit wall bracket. Patent Pending.

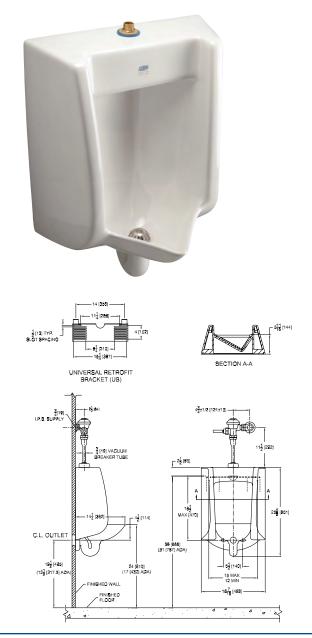

These dimensions and specifications are subject to change without notice. Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Zurn Industries, LLC

www.zurn.com