

Z250H-D FOG-ceptor™ Interceptor Buried Installation

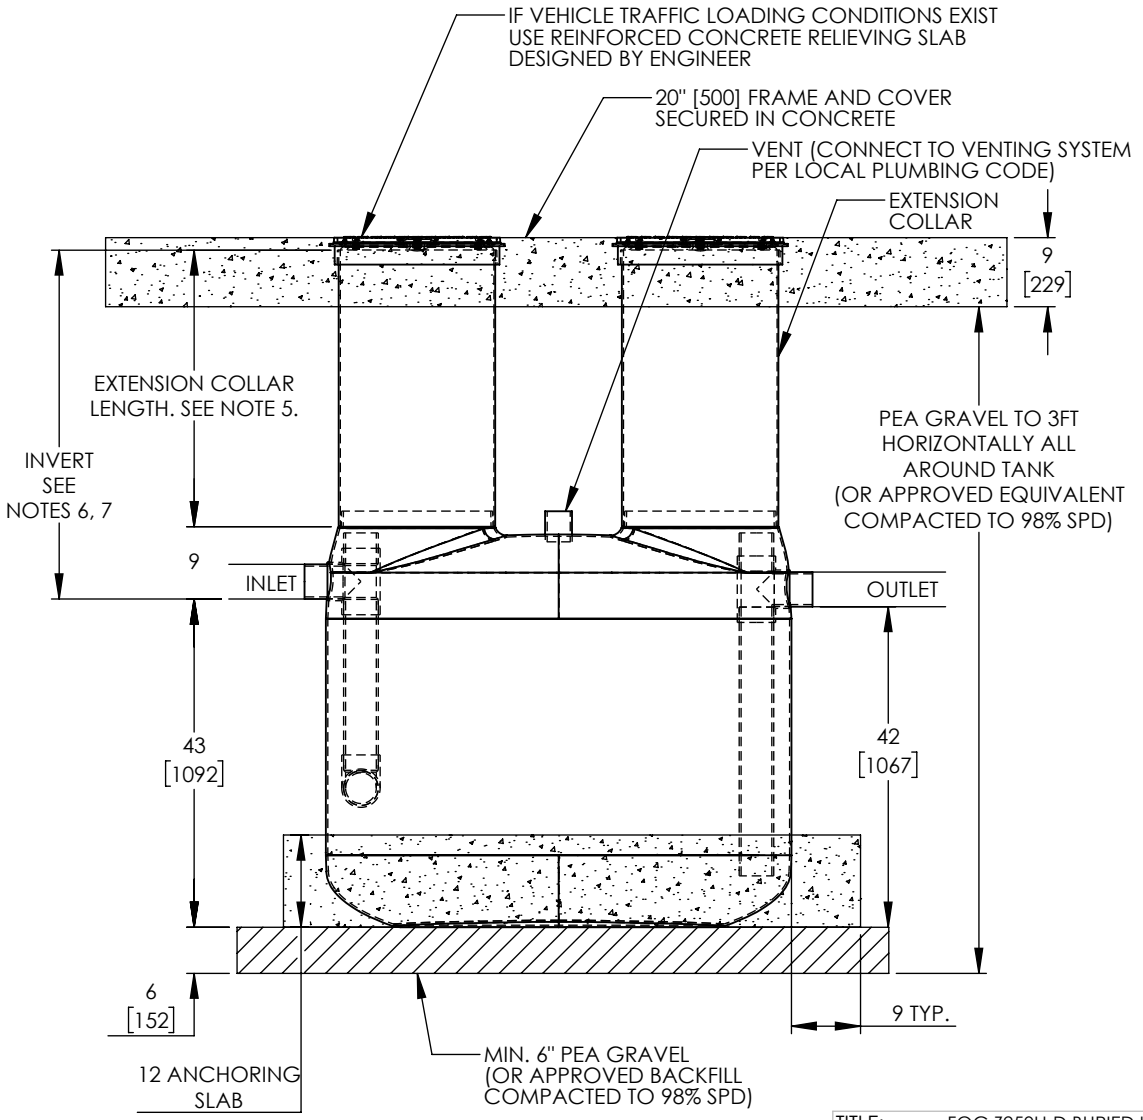

NOTES:

1. REFER TO INSTALLATION PROCEDURE AND INSTALLATION CHECKLIST.
2. ZURN INTERCEPTORS MUST BE INSTALLED IN ACCORDANCE WITH ALL RELEVANT FEDERAL, PROVINCIAL/STATE, AND LOCAL CODES INCLUDING LOCAL PLUMBING CODE.
3. FOR TRAFFIC AREA INSTALLATIONS WITH 3 FOOT BURIAL DEPTH, ANTI-BUOYANCY SLAB IS NOT REQUIRED. FOR INSTALLATIONS DEEPER THAN 3 FEET, PLEASE CONTACT YOUR LOCAL ZURN REPRESENTATIVE.
4. UNIT MUST BE INSTALLED WITH PROVIDED FLOW CONTROL.
5. STANDARD BURIAL DEPTH IS 3 FEET WITH SUPPLIED EXTENSION COLLARS. FOR BURIAL DEPTH UP TO 6 FEET MAXIMUM, ADDITIONAL 3 FEET LONG EXTENSION COLLAR COUPLINGS (PART Z250H EXT B) MAY BE PURCHASED. BURIAL DEPTH NOT TO EXCEED 6 FEET TOTAL.
6. USING STANDARD 3FT COLLAR RESULTS IN 45".
7. MAX TO BE 81". MINIMUM WITH TRAFFIC LOAD TO BE 27", MINIMIM WITHOUT TRAFFIC TO BE 21"

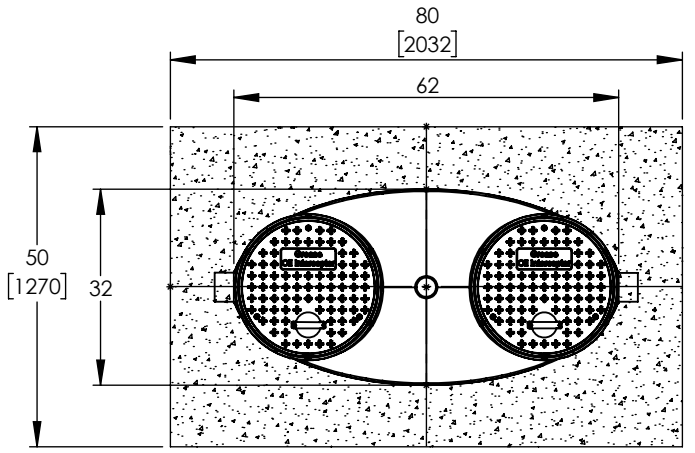

ANCHORING SLAB DETAIL

MODEL	DRY WEIGHT
Z250H	200 LBS [91 KG]

TITLE:	FOG Z250H-D BURIED INSTALL
250	249 US GALLONS
4"	INLET & OUTLET
20"	ACCESSWAY
ALL DIMENSIONS IN INCHES	
PROJECT:	WO:

NOTES

REV	DATE	DRAWN
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

DRAWN BY: A.L.

DRAWN DATE: NOV. 13, 2026

ZURN GreenTurtle

SIZE	DWG. NO.	REV.
A	26-5873-C	0

SCALE:1:20 | DO NOT SCALE DRAWING | SHEET 1 OF 1