


## GENERAL PRODUCT ILLUSTRATION ZN1203, ZN1204

## NARROW-WALL WATER CLOSET SYSTEMS

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

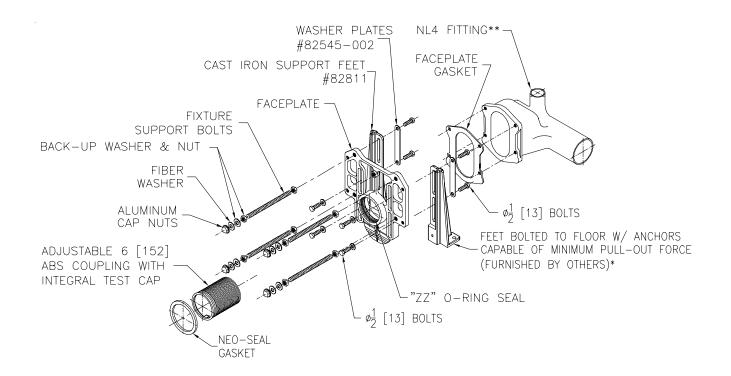

\*Carrier foot anchors must be able to withstand a pull-out force of 1004 Lb.[455 kg.]. Calculated value, no safety factor applied. \*\*Horizontal fitting shown. Vertical fittings also available.

## ZN1203, ZN1204 NARROW-WALL WATER CLOSET SYSTEM

## Offers:

- 1. All Dura-Coated cast iron construction with 300 lb. [136 Kg.] load bearing capability to A.N.S.I. A112.6.1M
- 2. Vertical adjustment of 4-1/2 [114] to 9-1/2 [241] for Siphon-Jet closet installation. System accommodates for both paraplegic and standard rough in requirements.
- 3. 9-3/8 [238] required from finished wall to back of system for ZN1203-N4 & ZN1204-N4, 9-7/8 [251] required for ZN1204-N5 & 10-7/8 [276] required for ZN1204-N6.
- 4. Non-corrosive ABS adjustable coupling with integral test cap and unique 'ZZ' Zurn adjusting thread.

Form # C33 Date: 04/24/07 C.N. No. 96510

Rev.