


Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

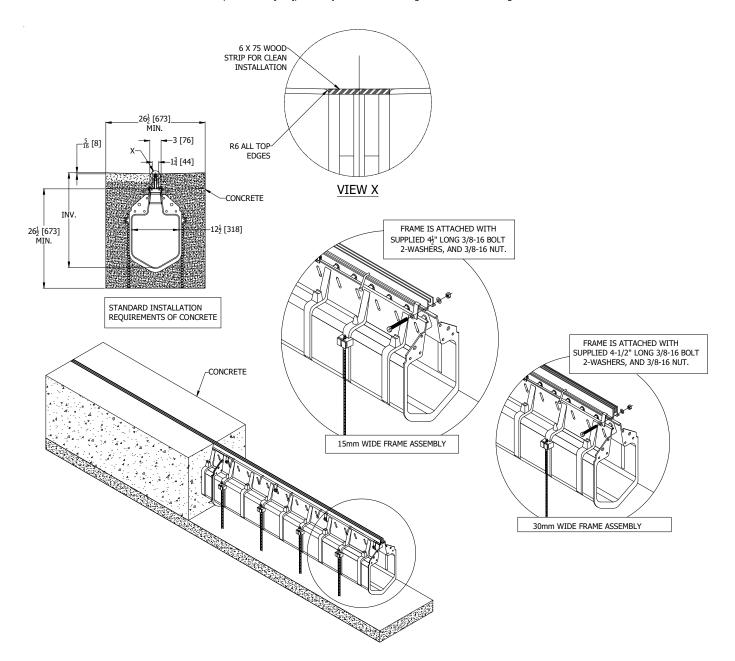

Our system can be installed with concrete when using our special steel riser. It comes in two standard heights: 50.8 mm and 101.6 mm and two standard widths: 15mm and 30mm. Different heights are available upon request. The standard concrete installation is suggested around the Hi-Cap body for strength. A standard installation of the concrete can be done up to a steel frame.

MARNING: Cancer and Reproductive Harm - <u>www.P65Warnings.ca.gov</u> ADVERTENCIA: Cáncer y daño reproductivo - <u>www.P65Warnings.ca.gov</u> A AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - <u>www.P65Warnings.ca.gov</u>

*Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292 www.zurn.com

Rev.	А
Date:	6/11/2018
C.N. No.	140145
Form No.	FT699