



Model BVLK

Ball Valve Handle Lock for 800 series ball valves




❑ Installation

TYPICAL INSTALLATION

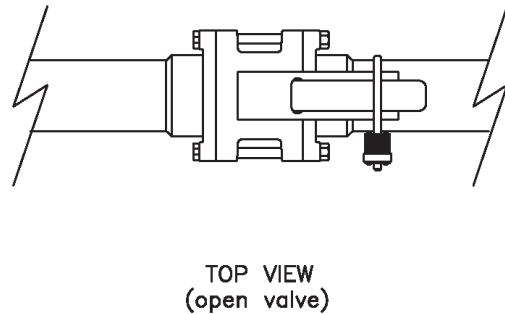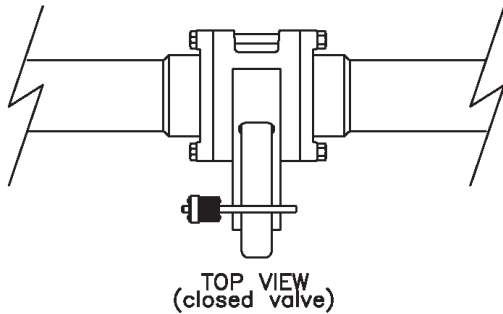


INSTALLATION

1. Turn ball valve handle to either the fully open or fully closed position.
2. Slide locking bracket over handle.
3. Position shackle of padlock over handle and through holes located on sides of locking bracket.
4. Place lock body on shackle and secure.
5. Check lock for fit and locked status.

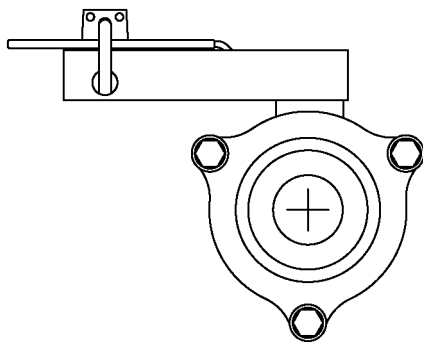

FRONT VIEW
(closed valve)

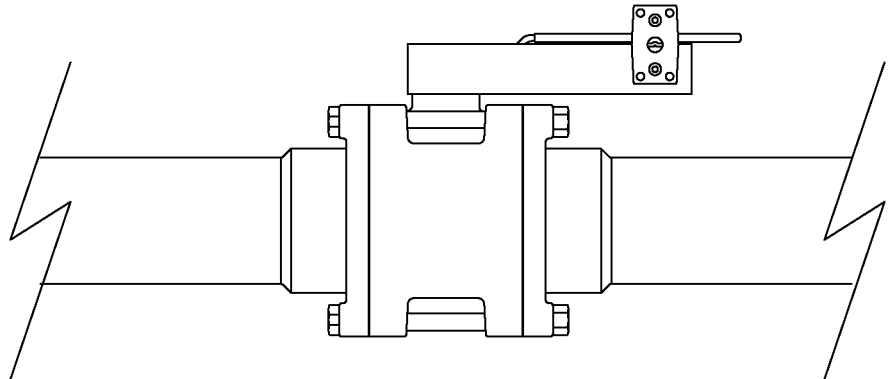

SIDE VIEW
(open valve)

WARRANTY: ZURN WILKINS Valves are guaranteed against defects of material or workmanship when used for the services recommended. If in any recommended service, a defect develops due to material or workmanship, and the device is returned, freight prepaid, to ZURN WILKINS within 12 months from date of purchase, it will be repaired or replaced free of charge. ZURN WILKINS' liability shall be limited to our agreement to repair or replace the valve only.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov
⚠ **AVERTISSEMENT:** Cancer et néfastes sur la reproduction - www.P65Warnings.ca.gov



1747 Commerce Way, Paso Robles, CA 93446 Phone:855-663-9876 Fax:805-238-5766

ZURN WILKINS