

Model ZW206 - Solenoid Control Valve

Control Valve Order Form



Customer:	Date:
Contact:	Email:
Telephone/Fax:	Ref. P. O.

Required Valve Information

All returns are subject to a restocking/refurbishing fee. Contact Customer Care for details on return policies.

Quantity: _____

Size: (Check one) 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 6" 8" 10" 12" 14" 16"

Caution: The recommended installation orientation for ACVs is horizontal, with the valve cover up. 6" and larger valves should only be installed horizontally, with the valve cover up, due to the difficulty of properly bleeding air out of the cover and performing maintenance on valves installed in the vertical orientation.

Function Options:

- Check all that apply
- "C" Option * - Check Valve with Isolation Valve
 - "L" Option * - Closing Speed Control (Standard on 6" or larger)
 - "O" Option * - Opening Speed Control


Valve body is ductile iron, epoxy coated

Body Options:

- Check one
- Standard - Full Port Globe Body
 - "A" Option - Angle Style Body (1-1/4" - 10")
 - "R" Option - Reduced Port Body (3" - 10" Flanged Only)

End Connections:

- Check one
- Standard - ANSI Class 150 Flanges (1-1/2" - 16")
 - "G" Option - IPS Grooved (1-1/2" - 10")
 - "TH" Option - NPT Threaded (1-1/4" - 3")
 - "Y" Option * - ANSI Class 300 Flanges (1-1/2" - 16")

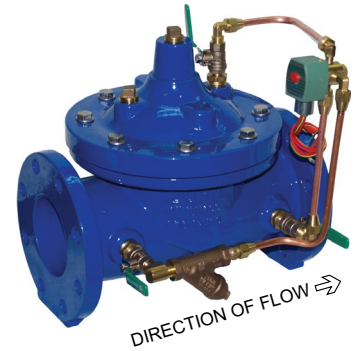

Main Valve Options:

- Check all that apply
- Standard - Stainless Steel Seat, Seal Ring Retainer and Stem Guide
 - "V" Option * - Viton Rubber Internals, Rated 180° (1-1/4" - 6")
 - "Z" Option *1 - Visual Position Indicator
 - "SO" Option *1 - Limit Switch Open Trip
 - "SC" Option *1 - Limit Switch Closed Trip
 - "SD" Option *1 - Limit Switch Dual Trip

Pilot Options:

- Check all that apply
- Standard - Isolation Valves and "Wye" Type Strainer
 - Standard - Copper Tubing and Brass Fittings
 - "SP" Option * - All Stainless Steel Pilotry (replaces all Brass Fittings, Pilot Valve & Copper Tubing". "GL" Option included)
 - "SH" Option * - Stainless Steel Braided Hoses (only replaces Copper Tubing)

- Check one
- "NC" Option - Normally Closed (energize to open) Main Valve, 120vac/60 Hz Solenoid
 - "NO" Option - Normally Open (energize to close) Main Valve, 120vac/60 Hz Solenoid
 - "24NC" Option - Normally Closed (energize to open) Main Valve, 24vac/60 Hz Solenoid
 - "24NO" Option - Normally Open (energize to close) Main Valve, 24vac/60 Hz Solenoid
 - "NS" Option * - Non-Standard Solenoid (specify Voltage/Frequency/AC/DC/Operation)
V _____ Hz _____ AC/DC _____ NO/NC _____

- Check all that apply
- "MO" Option * - Manual Operator on Solenoid Valve (to control during power failure)
 - "RV" Option - Pilot Installed on Reverse Side

*Adder to standard price applies

*Limit switch and position indicator options cannot be combined

1747 Commerce Way
Paso Robles, CA 93446
Phone: 855-663-9876
Fax: 805-237-7197

Customer Service Representatives available
Monday through Friday 5:30 a.m. to 5:00 p.m., PST
Fax completed forms to 805-237-7197, attention: Sales
Call 855-663-9876, wilkinscs@zurn.com
or visit us online at www.zurn.com

