




Zurn PEX[®] CR - Polymer Fittings UL 1821 Listed Barb Coupling - QQPC55FX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

Note: Barb geometry will vary depending upon barb size.

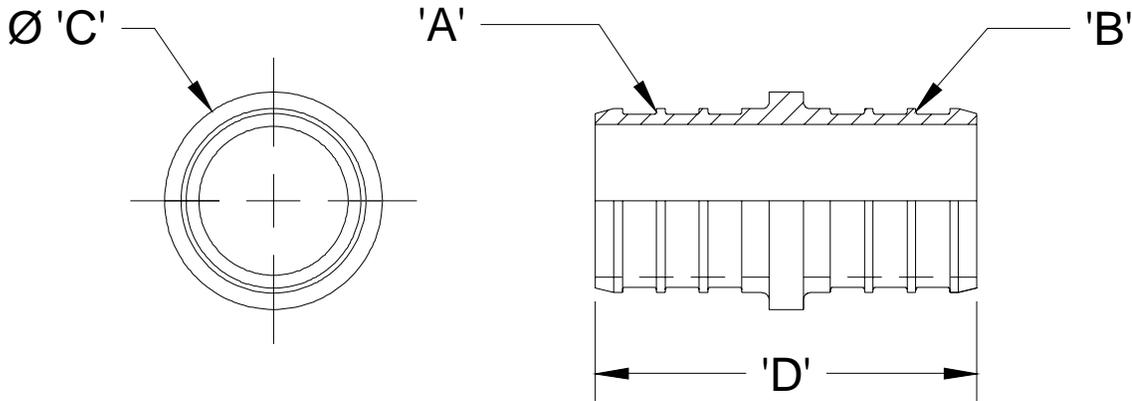

Part	Description	'A'	'B'	'C'	'D'
QQPC55FX	1" Barb x 1" Barb Coupling	1" Barb	1" Barb	0.95" [24.1]	1.83" [46.5]

Engineering Specification: Zurn PEX[®] CR Polymer Coupling. The QQPC55FX coupling is used to connect PEX tubing to PEX tubing. Molded from Acudel[®]. These fittings, as a system with Zurn PEX[®] tube, are pressure rated at 160 PSI at 73°F, 130 PSI at 120°F (fire protection rating), 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, ASTM F2159, and UL 1821.

Accessories

- ___ **QCLP5X** 1" QuickClamp[®] Crimp Ring
- ___ **QCR5X** 1" Copper Crimp Ring

Rev.	Date: 10/08/10	C.N. No. 111809
Dwg. No. 302749		Prod. No. QQPC55FX