


TAG

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

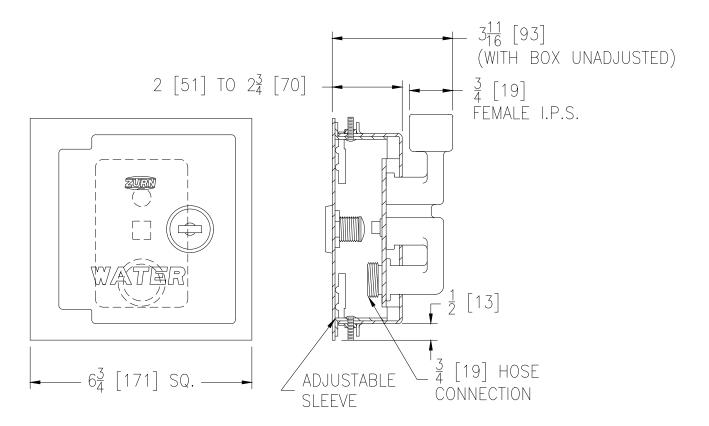

Wall Thickness	Approx. Wt.
In. [mm]	Lbs. [kg]
4 [102]	4 [2]

ENGINEERING SPECIFICATION: Z1350 Encased moderate climate wall hydrant for narrow wall installation. Complete with bronze body, all bronze interior parts, replaceable seat washer, screwdriver operated stop valve in supply, key operated control valve, and 3/4 [19] IP female inlet and 3/4 [19] male hose connection standard. Adjustable stainless steel box furnished with hinged cover, cylinder lock and "WATER" stamped on cover.

OPTIONS (Check/specify appropriate options)

SUFFIXES

 Hydrant Parts Repair Kit
 3/4 [19] Adapter Vacuum Breaker
 3/4 [19] IP 90° Inlet Elbow Adapter
 3/4 [19] Solder Female Inlet Adapter

**NOTE: The adjustable sleeve on the stainless steel box is provided with a gasket as standard, but additional caulking of all inside joints is required (by others) after the hydrant box has been properly set. Caulking should be performed on all open seams, including the seams where the gasket is present.

WARNING: Cancer and Reproductive Harm - <u>www.P65Warnings.ca.gov</u>		
ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov		
AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - <u>www.P65Warnings.ca.gov</u>		
	Dev	V

	Rev.	K
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876	Date:	01/17/23
	C.N. No.	144900
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216	Patent zurn.com/patents	
www.zurn.com	Prod. Dwg. No. Z1350	