


AquaVantage AV™	Model
Tag	

Concealed Z6150AV ModelFor Flushing Rim Floor Drain

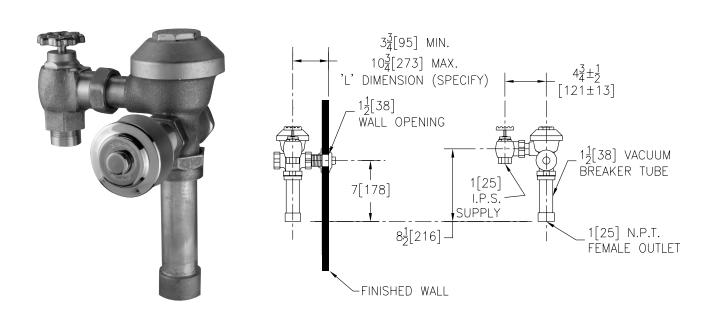

Flow Options

☐ **-WS1** 1.6 Gal. Low Consumption Flush

☐ **-FF** 4.5 Gal. Full Flush ☐ **Standard Flush** 3.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

-BG BioCare HandleJ Metal Oscillating Handle

_____ -J Metal Oscillating Handle 3" [76] Metal Push Button

Other

ENGINEERING SPECIFICATION: ZURN Z6150AV AquaVantage™ 'AV' Concealed Flush Valve For Flushing Rim Floor Drain - Concealed, quiet diaphragm-type, rough brass, flushometer valve with Zurn's AquaVantage TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered bypass. The valve is complete with a non-hold open and no leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for back spud connection. Control stop has internal siphon-guard protection, and a sweat solder kit. Internal seals are made of chloramine resistant materials.

This space is for Architectural/Engineering Approval

Date: 6/12/01

ZURN PLUMBING PRODUCTS GROUP COMMERCIAL BRASS OPERATION, 5900 ELWIN BUCHANAN DRIVE, SANFORD, NC 27330 PHONE: 1-800-997-3876, FAX: 919-775-3541, WEBSITE: www.zum.com