




# ZRK-C\_\_ RetroFlush Retrofit Kit For Closet Valves

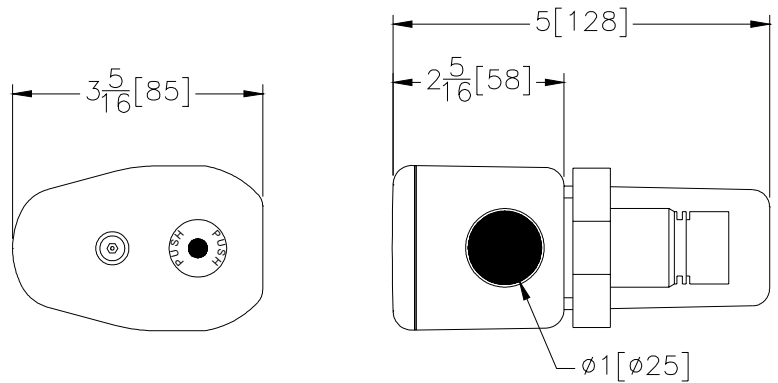

### Suffix Options (Check/Specify Appropriate Options)

_____	<b>-1.6</b>	1.6 Gallons Per Flush
_____	<b>-3.5</b>	3.5 Gallons Per Flush
_____	<b>-4.5</b>	4.5 Gallons Per Flush
_____		Other

**ENGINEERING SPECIFICATION: ZURN ZRK-C RetroFlush AquaSense 'AV' Retrofit Kit-** The AquaSense RetroFlush Kit is equipped with an infrared sensor, a DC solenoid, and integral battery holder for four AA alkaline batteries. The unit comes complete with tempered glass replaceable lens, a manual override push button, four AA batteries, switchable courtesy flush, switchable automatic 24 hour flush, maintenance override, range adjustment light, low battery indicator, abnormal reflection indicator, chrome plated metal housing, field adjustable range, and infrared beam tilt adjustment. The kit also includes a filtered riser tube and a TPE chemical and clog resistant diaphragm kit.

This space is for Architectural/engineering Approval