


TAG	



Engineering Specifications: Zurn AquaSpec® Z842U6

Polished chrome-plated cast brass 8" [203mm] sink faucet with quarter turn ceramic disc cartridges, 3/8" [10mm] short swivel inlets providing adjustable centers from 7-1/4" [184mm] to 8-3/4" [222mm] and a 6" [152mm] centerline rigid gooseneck spout with vacuum breaker and a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow). Unit is furnished with 6" [152mm] vandal-resistant color-coded metal wrist blade handles.

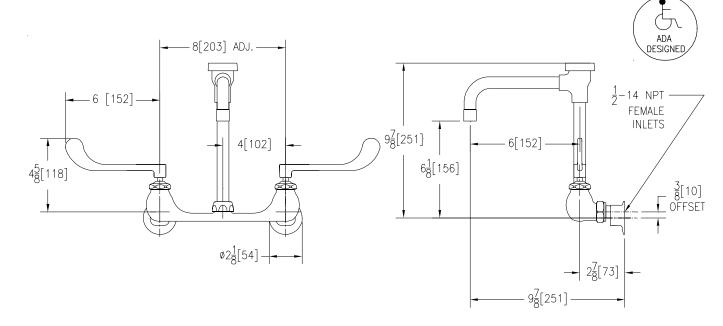

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
CS	Check Stop
FC	2.0 GPM [7.6L] Laminar Flow Control in Base of Spout
HCT	Hot/Cold Text Indexes
LP	Low Profile
LSI	2-1/2" [64mm] Long Swivel Inlets with Integral Stops
PT	1-1/4" [32mm] Cast-Brass P-Trap with a 7-12" [191mm] Long 17-Gauge Wall Bend
RC	Rough Chrome Plated
6M	2.0 GPM [7.6 L] Male Serrated Nozzle Outlet
7M	1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet
16M	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male Spray Outlet
17M	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Aerator
18M	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Laminar Flow

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

Date: 6/28/06