


SINK FAUCET Z842T6 TAG



Engineering Specifications: Zurn AquaSpec[®] Z842T6

Polished chrome-plated cast brass 8" [203mm] sink faucet with quarter turn ceramic disc cartridges, 3/8" [10mm] short swivel inlets providing adjustable centers from 7-1/4" [184mm] to 8-3/4" [222mm] and a 4-1/2" [114mm] centerline rigid gooseneck spout with vacuum breaker. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow) and 6" [152mm] vandal-resistant color-coded metal wrist blade handles.

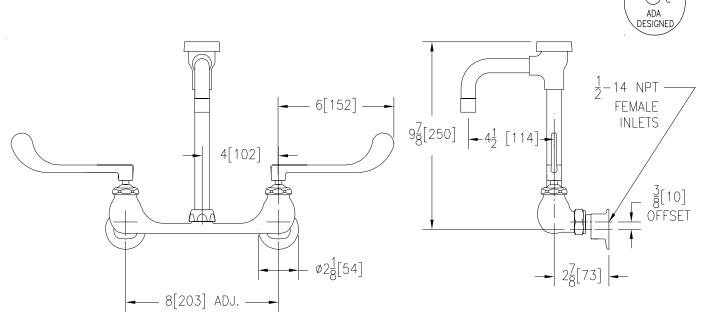

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

 -CS Check Stop -FC 2.0 GPM [7.6L] Laminar Flow Control in Base of Spout -HCT Hot/Cold Text Indexes -LP Low Profile -LSI 2-1/2" [64mm] Long Swivel Inlets with Integral Stops -PT 1-1/4" [32mm] Cast-Brass P-Trap with a 7-12" [191mm] Long 1" -RC Rough Chrome Plated -6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male -17M 1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male 	
 -HCT Hot/Cold Text Indexes -LP Low Profile -LSI 2-1/2" [64mm] Long Swivel Inlets with Integral Stops -PT 1-1/4" [32mm] Cast-Brass P-Trap with a 7-12" [191mm] Long 1" -RC Rough Chrome Plated -6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male 	
 -LP Low Profile -LSI 2-1/2" [64mm] Long Swivel Inlets with Integral Stops -PT 1-1/4" [32mm] Cast-Brass P-Trap with a 7-12" [191mm] Long 1" -RC Rough Chrome Plated -6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male 	
 -LSI 2-1/2" [64mm] Long Swivel Inlets with Integral Stops -PT 1-1/4" [32mm] Cast-Brass P-Trap with a 7-12" [191mm] Long 1" -RC Rough Chrome Plated -6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male 	
 -PT 1-1/4" [32mm] Cast-Brass P-Trap with a 7-12" [191mm] Long 1" -RC Rough Chrome Plated -6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male 	
-RC Rough Chrome Plated -6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male	
-6M Male Serrated Nozzle Outlet -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male	7-Gauge Wall Bend
-7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male	
-16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Mal	
-17M 1.5 GPM [5.7.1.] Vandal Resistant Pressure Compensating Mal	le Spray Outlet
	e Aerator
18M 1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Mal	e Laminar Flow

ZURN INDUSTRIES, INC. COMMERCIAL BRASS OPERATION 2640 SOUTH WORK STREET FALCONER NY 14733 Phone: 1-716-665-1132 + Fax: 1-716-665-1135 + World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292