


4" CENTERSET GOOSENECK

79	1	7	Т	7
_ C	, ,			

$T \wedge C$		
TAG		
1710		

Engineering Specifications: Zurn AquaSpec® Z812T2

Polished chrome-plated cast brass faucet body with integral shanks, quarter turn ceramic disc cartridges and a 4-1/2" [114mm] centerline rigid gooseneck spout with vacuum breaker. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), vandal-resistant color-coded metal four arm handles, mounting hardware and 1/2" NPSM coupling puts for standard layatory risers

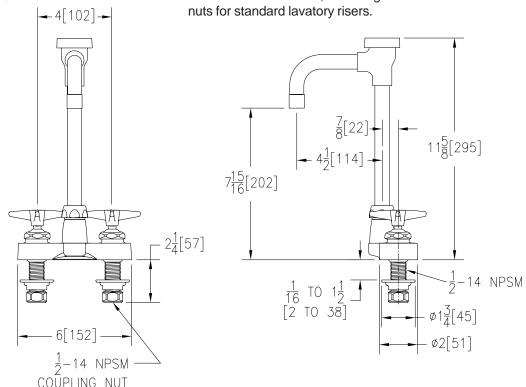

Note: All dimensions are for reference only. Do not use for pre-plumbing.

OPTIONAL ACCESSORIES

Suffix		Description
	-FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
	-G	1-1/4" [32mm] Grid Strainer Drain
	-LP	Low Profile
	-P	1-1/4" [32mm] Pop-up Drain
	-PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
_	-2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Aerator
	-3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Male Aerator
	-4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Laminar Flow
	-5F	2.0 GPM [7.6 L] Male Spray Outlet
	-6M	2.0 GPM [7.6 L] Male Serrated Nozzle Outlet
	-7M	1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet
	-16M	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male Spray Outlet
	-17M	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Aerator
	-18M	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Laminar Flow

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com