


13" DOUBLE-JOINTED SPOUT

G61301 ('K')

$T \wedge C$	
TAG	

Engineering Specification: Zurn AquaSpec® G61301 ('K')

Polished chrome-plated brass 13" [330mm] tubular spout with swing connection and 3/4"-27 male outlet threads.

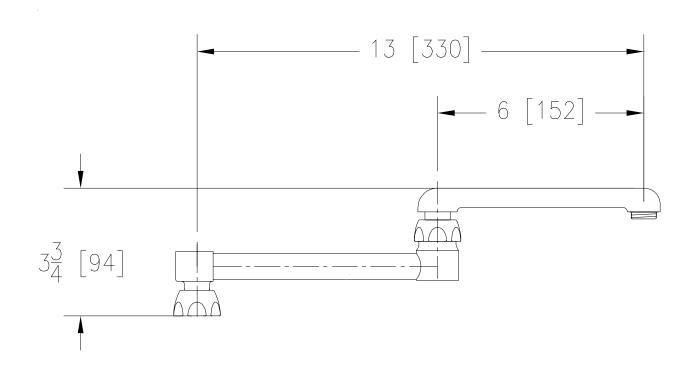

Note: All dimensions are for reference only. Do not use for pre-plumbing.

OPTIONAL ACCESSORIES

Suffix	Description
FC	Flow Control in Base of Spout (Specify GPM Flow 0.5, 1.0, 1.5, 2.0)
1F	2.2 GPM [8.3 L] Variable-Pressure Compensating Female Aerator
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
2F 3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
4F 5F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
5F	2.0 GPM [7.6 L] Female Spray Outlet
7F	1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
11F	Female Threaded Single Screen Full Flow Outlet
15F	Female Full Flow Outlet
16F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
17F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
18F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
19F	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
21F	1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet
22F	1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet
23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

Date: 9/8/10