

ZURN

WIDESPREAD Z831G6-XL-P TAG


ADA

DESIGNED

Engineering Specifications: Zurn AquaSpec[®] Z831G6-XL-P

Polished chrome-plated widespread with adjustable centers from 6" [152mm] to 20" [508mm], an 8"[203mm] cast brass swing spout and quarter turn ceramic disc cartridges. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 6" [152mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware, 1/2" NPSM coupling nuts for standard lavatory risers and a 1-1/4" [32mm] pop-up drain. Widespread accommodates installations up to 1-1/2" [38mm] thick.

Zurn Lead Compliant* "XL" products are a line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn "XL" products are manufactured with *not more than 0.25% lead content when used with respect to wetted surfaces of pipes and pipe fittings, plumbing fitting and fixtures: California Health & Safety Code § 116875; Vermont 9 VCA § 2470h

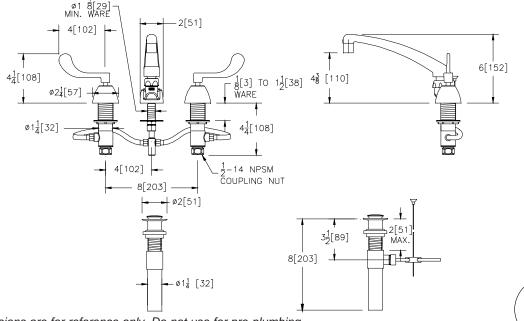

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

| Suffix | Description |
|--------|---|
| CWO | Cold Water Only |
| G | 1-1/4" [32mm] Grid Strainer Drain |
| -HCT | Hot/Cold Text Indexes |
| PT | 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend |
| -2F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator |
| 3F | 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet |
| 4F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| 7F | 1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet |
| -16F | 1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet |
| 17F | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator |
| -18F | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| 19F | 1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet |
| 21F | 1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet |
| 22F | 1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet |
| 23F | 1.5 GPM [5.7L] Pressure Compensating Female Aerator |
| | USTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com IDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292 |

In Canada: ZURN INDUSTRIES LIMITED • 3544 Nashua Drive • Mississauga, Ontario L4V1L2 • Phone: 905/405-8272 Fax: 905/405-1292

| AquaSpec [®] is a registered trademark of Zurn Industries, LLC | Rev. A | Date: 7/19/10 | C.N. No. 126592 |
|---|----------------|---------------|---------------------|
| ©2010 Zurn Industries, LLC | Dwg. No. 93190 |) Produ | uct No. Z831G6-XL-P |