


Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

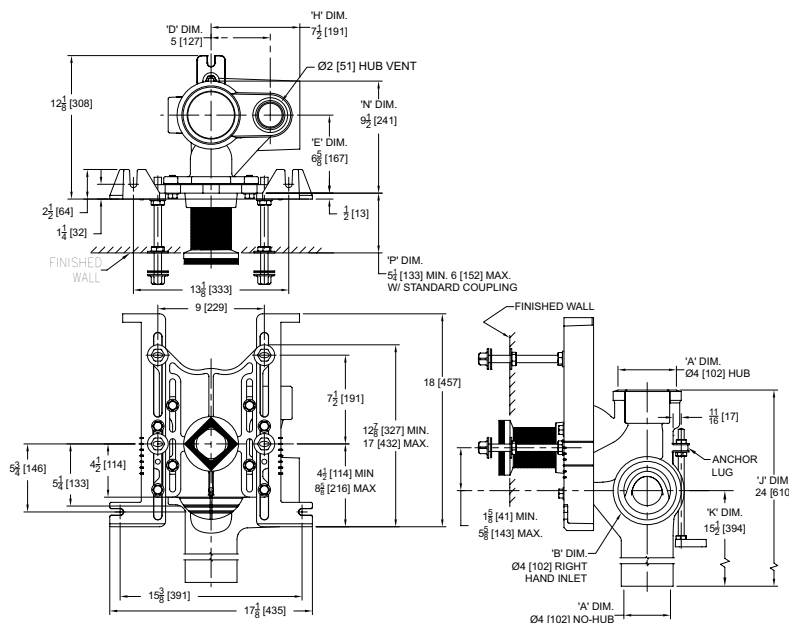

Product Number	Approx. Wt. lbs [kg]
Z1202-1HL4	88 [40]
Z1202-1HR4	

Note:

1. Z coupling, Min. 'P' Dim Obtainable=2 [51].
ZQ coupling, Min. 'P' Dim. Obtainable=5 [127].EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor foot required for secure installation.
4. 2 [51] Hub Vent located on same side as 4 [102] side inlet.

Z1202-1HR4 Illustrated

ENGINEERING SPECIFICATION: ZURN Z1202-1H 4

EZCarry® vertical siphon jet water closet carrier system with high performance waterway and 4" [102mm] hub and spigot connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, 4" [102mm] side inlet, adjustable gasketed faceplate, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, heavy-duty 1/2" [13mm] rear anchor tie down, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

OPTIONS (Check/specify appropriate options)

Z1202-1HL4	4 [102] Hub and Spigot Stack, Single Inlet, 4 [102] Left Hand Side Inlet, 2 [51] Left Hand Vent.
Z1202-1HR4	4 [102] Hub and Spigot Stack, Single Inlet, 4 [102] Right Hand Side Inlet, 2 [51] Right Hand Vent.

PREFIXES

_____ Z	D.C.C.I. System with Zurn ZZ Adjustable Coupling*
_____ ZQ	D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

___ -A	Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])	___ -JR	2 [51] Right-Hand Auxiliary Inlet (For 1HR4 Only)
___ -CC	Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])	___ -M	Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457])
___ -CE	EZ-Set™ Coupling (NPSM 6 [152] ,12 [305] or custom)(NPT 12 [305] or custom)	___ -RYK17	One Piece Unistrut Pre-Fab Foot
___ -CL	Custom Length Standard Coupling with Integral Test Cap(Specify Length 4, 8, 10, 12 [102, 203, 254, 305])	___ -VL	Left Hand Vent Connection (For 1HR4 Only)
___ -CS	2-1/4 [57] Polymer Coupling with Integral Test Cap	___ -VP	Vandal-Proof Trim
___ -F	Floor Mounted, Back Outlet Fixture Support	___ -X2	2 [51] Carrier Foot Extension Assembly
___ -G	Galvanized Cast Iron	___ -X3	3 [76] Carrier Foot Extension Assembly
		___ -45	Finishing Frame for Siphon Jet System
		___ -50	Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

* Regularly furnished unless otherwise specified.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠️ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. H
Date: 01/02/23
C.N. No. 144897
Patent zurn.com/patents
Prod. | Dwg. No. Z1202-1H 4