

# Model Z5655.441.00.00.00

1.1 GPF Elongated Floor Mounted EcoVantage® Manual Flush Valve Toilet System

T A	_		
TA	<i>1 -</i> -		
	u		

#### **Z5655 HET Series**

- Zurn One HET Toilet System designed for optimal performance between Zurn fixture and Zurn flush valve to save water.
- 1.1 gpf (gallons per flush)
- 14% water savings over standard 1.28 gpf system
- 31% water savings over standard 1.6 gpf system
- · Vitreous china
- Elongated front rim
- 2-1/8" fully glazed trapway
- · High efficiency siphon jet flush action
- Zurn product system component compatibility and quality assurance
- Shipping Weight: 62 lbs.



Z5655 Series Elongated (shown with seat)

### **Recommended Trim:**

- Z5955SS-EL Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.
- ☐ **Z5972-COMB** Closet bolt/wax ring kit.

Note: To ensure system performance:

Minimum Running Water Pressure = 25 psi.



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Fixture dimensions meet ANSI/ASME standard A112.19.2



and CAN/CSA B45 requirements.
In Canada - Consult local codes and standards.

EcoVantage® and AquaVantage® are registered trademarks of Zurn Industries

All dimensions and specifications are subject to change without notice.

## **Engineering Specification**

Z5655.441 EcoVantage® High Efficiency Toilet System -System comes complete with exposed manual Z6000AV-ONE high efficiency flushometer valve and floor mounted, vitreous china toilet. The system is designed to perform to industry standards with as little as 1.1 gallons per flush. The EcoVantage® valve is an exposed, quiet diaphragm type that is complete with Zurn's AguaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered by-pass. The valve has a non-hold open and no leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon guard protection. Internal seals are made of chloramine resistant materials. Vitreous china toilet is 1-1/2" top spud with 2-1/8" fully glazed trapway and siphon jet action. Valve and toilet are an engineered system designed to provide optimal performance and 31% water savings over 1.6 gpf conventional toilets.

This space is for Architectural/engineering Approval

Zurn Industries, LLC

5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541

In Canada | Zurn Industries Limited

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6  $\cdot$  Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 2/15/2017 C.N. No. SAN007459

Prod. | Dwg. No. 315906





# Model Z5655.441.00.00.00

1.1 GPF Elongated Floor Mounted EcoVantage® **Manual Flush Valve Toilet System** 

### Rough-in dimensions for Z5655 Series

• Z5655.441.00.00.00 with top spud

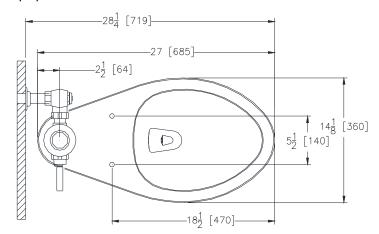

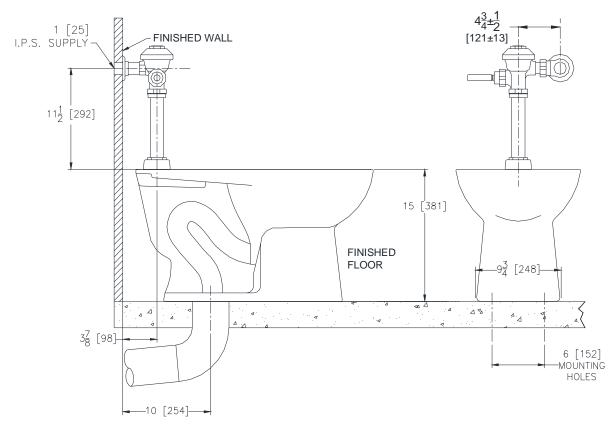

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

In Canada - Consult local codes and standards.

EcoVantage® and AquaVantage® are registered trademarks of Zurn Industries

All dimensions and specifications are subject to change without notice.

#### Zurn Industries, LLC

5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541 In Canada | Zurn Industries Limited

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 2/15/2017 C.N. No. SAN007459 Prod. | Dwg. No. 315906