




# ZE1201-HD4

ELONGATED BARREL FITTING 41 [1041]  
EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE  
SIPHON JET HUB & SPIGOT WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

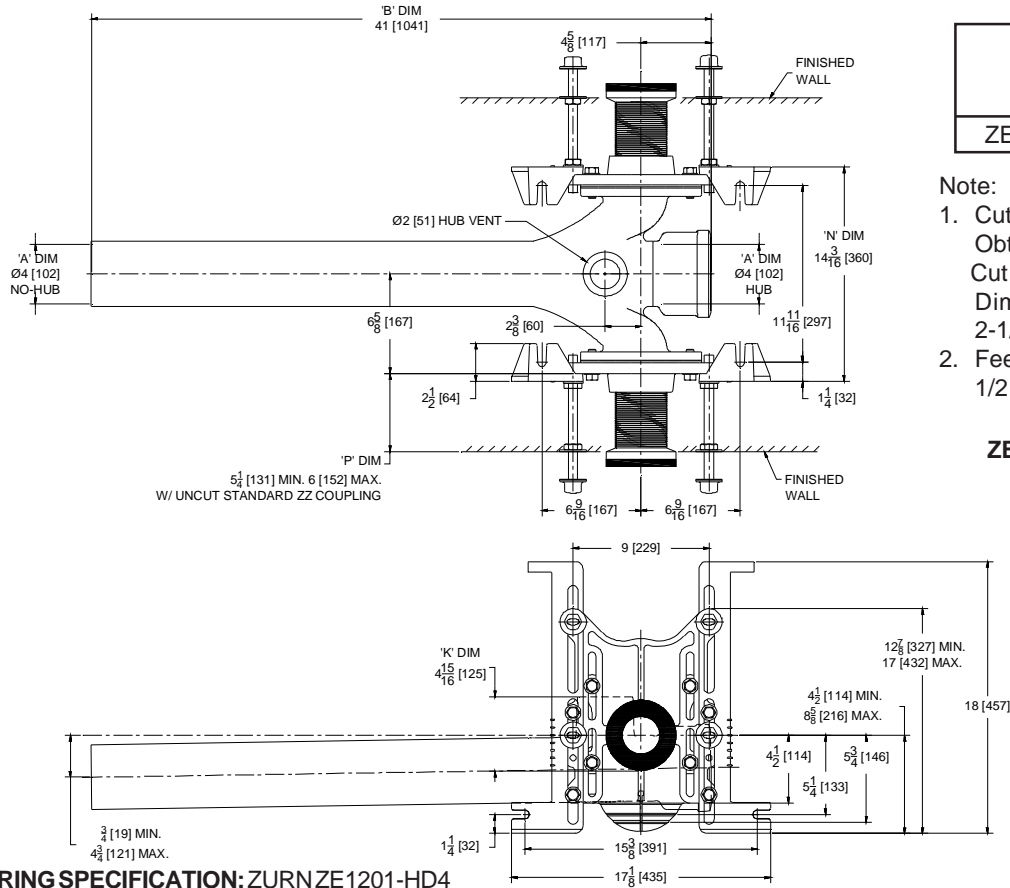

Product Number	Approx. Wt. lbs [kg]
ZE1201-HD4	125 [57]

## Note:

1. Cut ZZ coupling, Min. 'P' Dim. Obtainable=2 [51].  
Cut EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.

## ZE1201-HD4 Illustrated

## ENGINEERING SPECIFICATION: ZURN ZE1201-HD4

EZCarry® horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydromechanically optimized sweeps, 4" [102 mm] hub & spigot connections, 38" [965 mm] barrel for stall to stall direct connection, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] couplings with integral test caps, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gaskets optimize flow performance while reducing installation steps. Complete system includes adjustable, gasketed faceplates; floor mounted pre-fab foot supports with top anchoring pre-fab support base; heavy-duty 1/2" [13 mm] rear anchor tie downs; fixture bolts, trim, and stud protectors. EZCarry® narrow wall system complies with all applicable requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load.

## OPTIONS (Check/specify appropriate options)

\_\_\_\_ ZE1201-HD4 4 [102] Hub and Spigot Back-to-Back Inlet (Double)

## PREFIXES

\_\_\_\_ ZE D.C.C.I. System with Zurn ZZ Adjustable Coupling\*  
\_\_\_\_ ZQE D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

## SUFFIXES

____ -A Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])	____ -F Floor Mounted, Back Outlet Fixture Support
____ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])	____ -G Galvanized Cast Iron
____ -CE EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom) (NPT 12 [305] or custom)	____ -M Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457])
____ -CL Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])	____ -RYK17 One Piece Unistrut Pre-fab Foot
____ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap (ZZ Coupling Only)	____ -VP Vandal-Proof Trim
	____ -X2 2 [51] Carrier Foot Extension Assembly
	____ -X3 3 [76] Carrier Foot Extension Assembly
	____ -45 Finishing Frame for Siphon Jet System
	____ -50 Flush Valve Supply Support for Water Closets

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited  
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

[www.zurn.com](http://www.zurn.com)

Rev. G  
Date: 10/31/2019  
C.N. No. 142119  
Prod. | Dwg. No. ZE1201-HD4