



Z5681

Extra Heavy-Duty Stainless Steel, ZurnSHIELD™
Powder Coated Wall Hung Flush Valve Toilet

TAG _____

Architectural/Engineering Specification:

Z5681 ZurnSHIELD™ Powder Coated Extra Heavy-Duty Stainless Steel Wall Mounted Toilet

ZurnSHIELD™ powder coated stainless steel extra heavy duty wall mounted 1.6 gpf (6 Lpf) low consumption siphon jet toilet with custom elongated seat. Toilet is seamlessly welded #16 gage, type 304 stainless steel with white ZurnSHIELD™ powder coated exterior, brushed stainless steel finish in water contact area of sump, elongated rim and 1-1/2" top spud inlet connection. Matching elongated seat offers ZurnSHIELD™ protection and is designed with integral self-centering safety bumpers that prevent unwanted patient weight shifts. Toilet system is load tested to withstand up to 750 lbs. when installed with the Zurn (XH) carrier system, or up to 1,000 lbs. using the Zurn (-XB) carrier system without significant deflection or risk of catastrophic failure.

ZurnSHIELD™ protects the fixture and seat by inhibiting the growth of stain and odor causing mold mildew and bacteria, thus reducing the amount of time, chemicals and water to clean the seat.

Product Features:

Z5681 ZurnSHIELD™ Coated Heavy-Duty Wall Bowl

- Load tested to withstand 750 lbs. heavy duty load rating using the Zurn (-XH) carrier or 1000 lbs. bariatric load rating using the Zurn (-XB) carrier when tested in accordance with ASME/ANSI A112.19.12 standards.
- Paired system performance is guaranteed when installed with Zurn extra heavy-duty (-XH) or bariatric (-XB) closet carrier, thus eliminating risk of catastrophic load failure.
- 1.6 gallons of water per flush (6 Lpf)
- ZurnSHIELD™ powder coated exterior surface.
- Brushed stainless steel finish in water contact area of sump
- Manufactured of type 304 stainless steel
- Seamless construction
- 11" x 8" large water spot
- 1-1/2" top spud connection
- 3-1/2" trap seal depth
- Elongated open front, seat
- Seat is molded with integral self-centering, non-shift safety bumpers
- Shipping weight: 50 lbs.

Compliance and Certification:

- Complies with ASME A119.2 / CSA B45.1
- ADA Compliant



Recommended Heavy-Duty Carrier System:

- Z1203-N-XH: Adjustable horizontal 750 lb. extra heavy-duty siphon jet water closet carrier system.
- Z1204-N-XH: Adjustable vertical 750 lb. extra heavy-duty siphon jet water closet carrier system
- Z1203-N-XB: Adjustable horizontal 1,000 lb. bariatric siphon jet water closet carrier system.
- Z1204-N-XB: Adjustable vertical 1,000 lb. bariatric siphon jet water closet carrier system

Recommended Trim:

- Z6000AV-WS1 AquaVantage® 'AV' low consumption 1.6 gpf exposed closet flush valve.

NOTE: To ensure system performance minimum running water pressure = 25 PSI



The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.




Z5681

Extra Heavy-Duty Stainless Steel, ZurnSHIELD™
Powder Coated Wall Hung Flush Valve Toilet

TAG _____

Rough-in dimensions/Overview dimensions

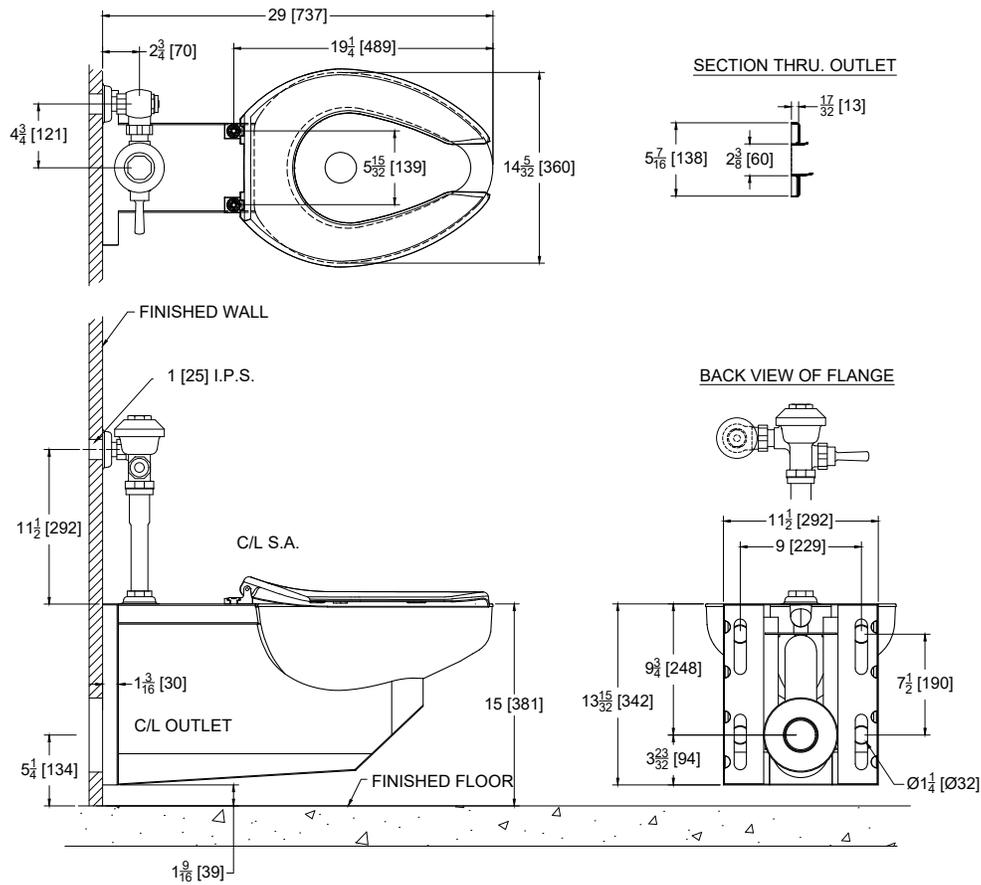

Note: For ADA compliance, rim height should be installed at 17"-19" from finished floor.