


TYPICAL INSTALLATION Z189 SCUPPER DRAIN

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

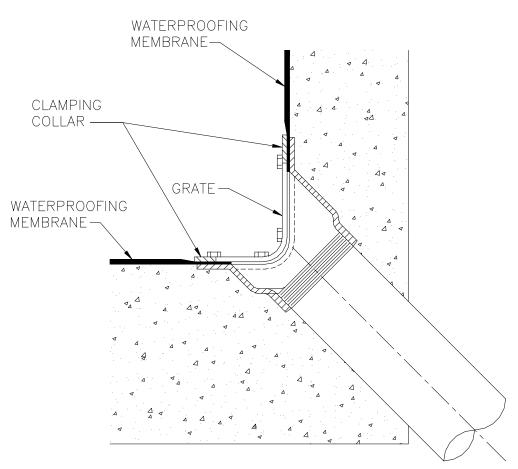

Z189 SCUPPER DRAIN

Drain is illustrated with regularly furnished combination grate & membrane clamp. The Zurn scupper drain can be installed in most roof construction. Dimensional data is shown in the Engineering Handbook and on the Zurn submittal drawings. The drain body is secured to the pipe by a threaded connection or a no-hub connector. The type of connection must be specified upon ordering. The waterproofing membrane is to run up to and over the clamping flange area. The clamping collar is then placed on the drain and then secured. The design and method used for the installation of roofing materials is by others. For other available scupper drains, see Z160, Z161 & Z187.

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev. A Date: 04/06/2018

C.N. No. 139850

Form No. RD53 Page 1 of 1