

4" CENTERSET GOOSENECK

Z812B1-XL-TWM

TAG



Engineering Specifications: Zurn AguaSpec® Z812B1-XL-TWM


Polished chrome-plated cast brass wall mounted faucet body with integral shanks, quarter turn ceramic disc cartridges and a 5-3/8" [137mm] centerline rigid or swing gooseneck spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 2-1/2" [64mm] vandalresistant color-coded metal lever handles and mounting hardware.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.



XL LEAD FREE

*This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

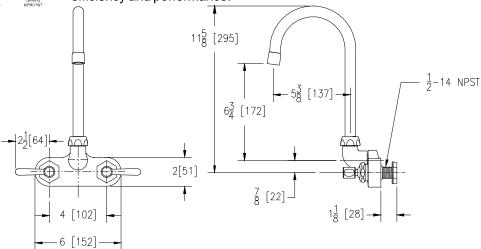

OPTIONAL ACCESSORIES

Note: All dimensions are for reference only. Do not use for pre-plumbing

Suffix	Description
□ -FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
□ -FC	Plain End Spout with Flow Control in Base of Spout (Specify GPM Flow 0.5, 1.0, 1.5)
□ -G	1-1/4" [32mm] Grid Strainer Drain
□ -GH	1-1/4" [32mm] Offset Handicap Grid Drain
☐ -HCT	Hot/Cold Text Indexes
□ -140	Restricted 140 ^j Swing Spout
□ -2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
□ -3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator
□ -4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow
□ -5F	2.0 GPM [7.6L] Female Spray Outlet
□ -7F*	1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet
□ -11F	Single Screen Outlet
□ -16F	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet
□ -17F*	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator
□ -18F*	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow
□ -19F*	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
□ -21F	1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet
□ -22F	1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet
□ -23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com