


WIDESPREAD Z831C1-HS-ICT TAG

Engineering Specifications: Zurn AquaSpec® Z831C1-HS-ICT

Polished chrome-plated 8" [203mm] widespread with a 8" [203mm] centerline rigid or swing gooseneck spout and quarter turn ceramic disc cartridges. Unit is furnished with a hose and spray, 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 2-1/2" [64mm] vandal-resistant color-coded metal lever handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/2" [38mm] thick.

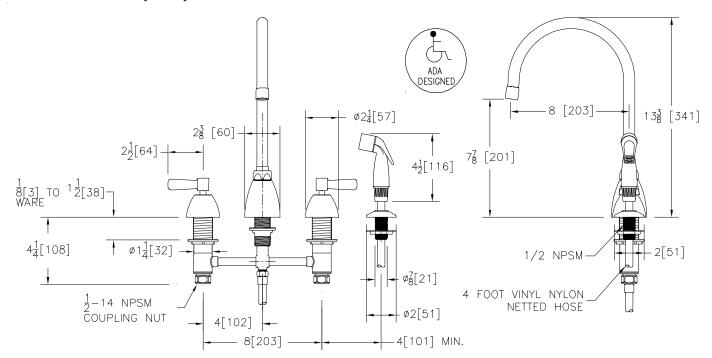

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Description
Cold Water Only
2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
1-1/4" [32mm] Grid Strainer Drain
1-1/4" [32mm] Offset Handicap Grid Drain
Hot/Cold Text Indexes
1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
2.0 GPM [7.6 L] Female Spray Outlet
1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Anti-Microbial Female Laminar Flow Outlet
1.0 GPM [3.8L] Female Laminar Flow Outlet
1.0 GPM [3.8L] Vandal-Resistant Female Laminar Flow Outlet

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292