


Z9A-E90 90° ELBOW THREADED X THREADED FOR ACID WASTE

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

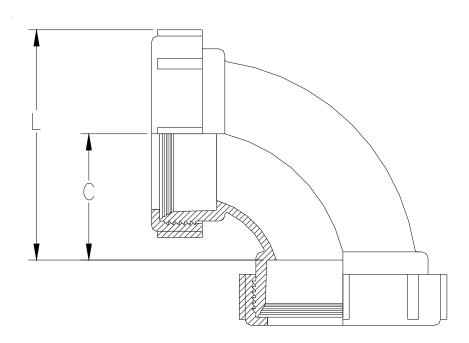

| Dimensions In Inches | | | | | |
|----------------------|-------------|---------------|--|--|--|
| Nominal Pipe Size | С | L | | | |
| 1-1/2 [38] | 1-3/4 [44] | 3-9/32 [83] | | | |
| 2 [51] | 2-5/16 [75] | 4-3/32 [104] | | | |
| 3 [76] | 3 [76] | 5-21/32 [144] | | | |
| 4 [102] | 3-7/8 [98] | 7-1/16 [179] | | | |
| 6 [152] | 5 [127] | 9-9/32 [236] | | | |

ENGINEERING SPECIFICATION:

ASTM-F1412, F.R.P.P.-210 ZURNZ9A-E90 90° ELBOW-THREADED X THREADED FLAME RETARDANT POLYPROPYLENE FITTING.

| | - 6 | ЭΙ. | 76 |
|--------------|-----|-----|----------|
| \mathbf{r} | | 31. | <i>-</i> |

1-1/2, 2, 3, 4, 6 [Sch 40 + Sch 80]

(Specify size/type) CONNECTION

- -F Fusion lock seal
- -M Mechanical joint seal
- -S Stab-Lock seal

REV. B DATE: 07/11/08 C.N. NO. 98752

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

DWG. NO. 63073

PRODUCTNO. Z9A-E90