


Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

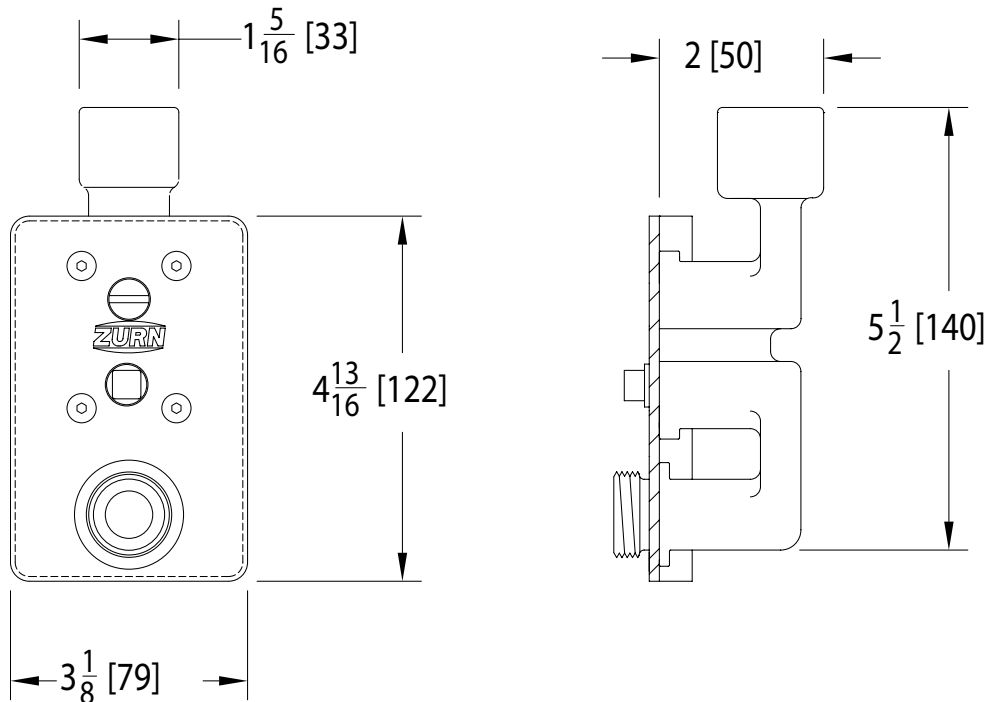

Wall Thickness In Inches	Approx. Wt. Lbs. [kg]
N/A	2 [1]

ENGINEERING SPECIFICATION: Z1349 Exposed moderate climate, wall hydrant for narrow wall installation, complete with bronze body, all bronze interior parts, replaceable seat washer, screwdriver-operated stop valve in supply, key-operated control valve, 3/4[19] female IP inlet connection standard, and 3/4[19] male hose connection. Includes operating key.

OPTIONS (Check/specify appropriate options)

SUFFIXES

___ -34FS	3/4[19] Female Solder Inlet Adapter
___ -34UN	3/4[19] IP 90° Inlet Elbow with Union Nut
___ -VB	3/4[19] Adaptor Vacuum Breaker
___ -RK	Hydrant Parts Repair Kit

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. B
Date: 01/17/23
C.N. No. 144900
Patent zurn.com/patents
Prod. | Dwg. No. Z1349