


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

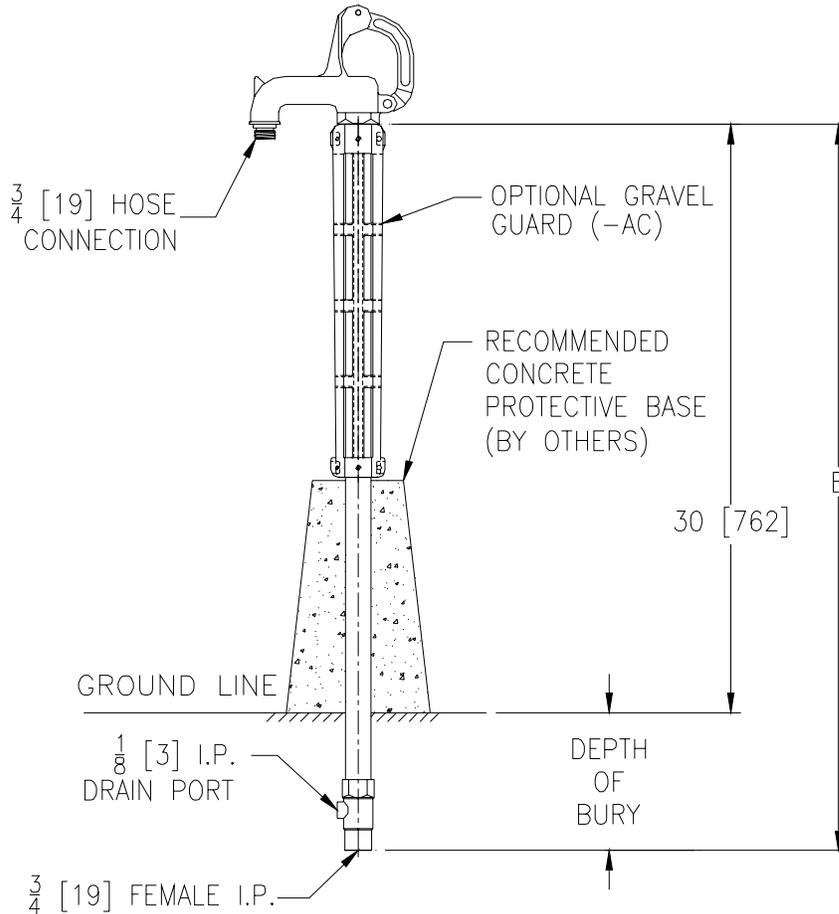

Depth of Bury in Feet [mm]	B Feet [mm]	Approx. Wt. Lbs. [kg]
2 [610]	4 1/2 [1372]	25 [11]
3 [914]	5 1/2 [1676]	29 [13]
4 [1219]	6 1/2 [1981]	33 [15]
5 [1524]	7 1/2 [2286]	37 [17]
6 [1829]	8 1/2 [2591]	41 [19]
8 [2438]	10 1/2 [3200]	49 [22]

ENGINEERING SPECIFICATION: Z1396 Exposed, non-freeze yard hydrant complete with Dura-Coated cast iron head and lift handle with locking capability, bronze interior parts, galvanized steel casing, bronze valve housing, and 3/4 [19] female IP inlet connection. Hydrant is equipped with a tapped 1/8 [3] drain port in the valve housing, and 3/4 [19] male hose connection.

NOTE: Non-freeze feature will not function when vacuum breaker option (-VB) is specified.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ____ -AC Aluminum Casing Guard
- ____ -HG Hydrant Guard
- ____ -RK Hydrant Parts Repair Kit
- ____ -VB 3/4 [19] Adapter Vacuum Breaker