

**Z5840****20" x 18" Wall Hung
Enameled Cast Iron Lavatory****TAG** _____**Architectural/Engineering Specification:**

20" x 18" enameled cast iron wall hung lavatory with various faucet holes setup.

Product Features:

- 20" [508 mm] x 18" [457 mm]
- Enameled cast iron
- Faucet holes for 4" or 8" centers
- Wall hung lavatory provided with wall hanger and mounting lugs for use with exposed arm carrier systems.
- Front Overflow
- Waste: 1-1/4" O.D.
- Depth: 6-1/2"
- Shipping Weight: 60lbs.

Recommended Trim:

- | | |
|--------------|---------------------------------------|
| Z8743-PC | Grid Strainer |
| Z8700 Series | P-Trap |
| Z8800 Series | Top with Flexible Supplies |
| Z8946-1-NT | ADA Trap, Stop, and Supply Protectors |

Optional Trim:

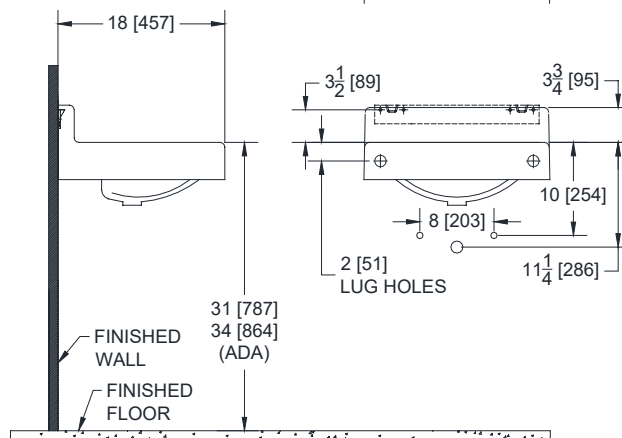
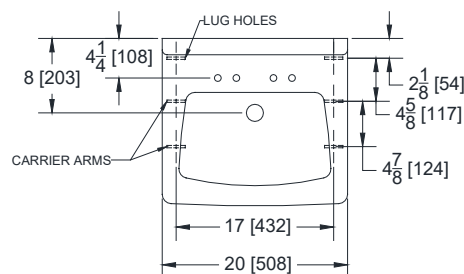

- | | |
|------------|--|
| Z8746-PC | ADA Grid Strainer |
| Z8946-3-NT | ADA Trap, Stop, and Supply Protectors for Offset Grid Strainer |

Configurations:

- | | |
|-------|--------------------------------------|
| Z5841 | Lavatory with single faucet hole |
| Z5844 | Lavatory with 4" center faucet holes |
| Z5848 | Lavatory with 8" center faucet holes |

Compliance and Certification:

- ADA Compliant

**Rough-in/Overview dimensions for Z5840 Series**

Z5841 Lavatory with single hole faucet
 Z5844 Lavatory with 4" center faucet holes
 Z5848 Lavatory with 8" center faucet holes

**Note: For exposed arm carrier installation, see Zurn
 Z1231-AL Rough-in sheet from Carrier Code Book.**

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed 34" [864mm] from finished floor. Fixture dimensions meet ASME A112.19.1/CSA B45.2 requirements. In Canada - Consult local codes and standards.

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
 Please contact Zurn for most up to date information.