


TEMP-GARD III TUB and SHOWER UNIT

Z7302-SS-MT-S8

T	Ά	G
---	---	---

ENGINEERING SPECIFICATIONS: ZURN Z7302-SS-MT-S8

Single handle pressure balancing mixing tub and shower unit, ceramic control cartridge with stainless steel balancing piston, built in reverse connection capability (To reverse the hot and cold inlets simply remove cartridge and turn 180°), two service stops / check stops, and adjustable limit stop. When valve is turned on it must rotate from cold through to the hot position. All exposed trim and handle are metal with polished chrome plated surface. The valve is supplied with the (ABS plastic) 1.75 GPM flowrate, adjustable spray -S8 shower head, arm, flange, and (T2) diverter tub spout in polished chrome plated finish. The valve body is a four port valve with a tub port plug included for shower only applications. The valve inlets, shower and tub outlet are all standard with 1/2" NPT female thread connections. The 1/2" copper sweat options must be specified as shown below.

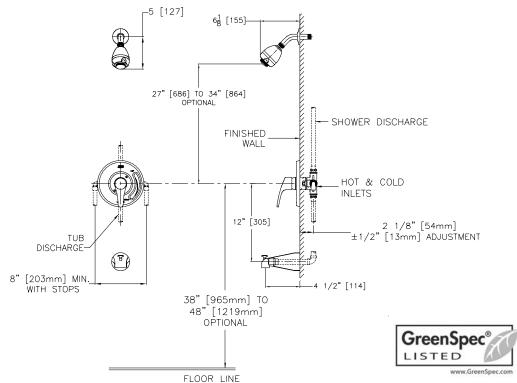

Note: All dimensions are for reference only. Do not use for pre-plumbing.

Parts shown as hidden lines are supplied by others. OPTIONS (Check/specify appropriate options) Use with Z7300 prefix Suffix Description

__ -CPVC 1/2" Male NPT by CPVC Female Adaptors, shipped loose to be installed in the field.

__ -EXT Extension Kit, Extends Valve Out by 1".

-PEX 1/2" Male NPT by PEX Adaptors, shipped loose to be installed in the field.

-SSC 1/2" Female Copper Sweat Connections w/ Service Stops

-ST Sierra Series Decorative Metal Trim

____ -STN Sierra Series Decorative Metal Trim, in Satin Nickel Finish
-WF Wall Mounting Flange For Fiberglass or Panel Wall Installation

Additional Options

Z7000-SC
 Z7000-S5
 Z7000-S5
 Z7000-S6
 Pair of Dual Spring Check Valves
 Large Brass Shower Head with Spray Adjustment
 Small Brass Shower Head with Spray Adjustment

__ Z7000-T2-SJ Tub Spout with Pull-Up Diverter and 1/2" Slip Joint Connection

STANDARDS

Tested to meet the following standards for valves and plumbing fittings: ASSE Standard No. 1016

ASME A112.18.1 / CSA B125.1 IAPMO® Listed





ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292