




Zurn PEX® XL-Low Lead Brass Barb x MPT Elbow - QQE33BTGX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

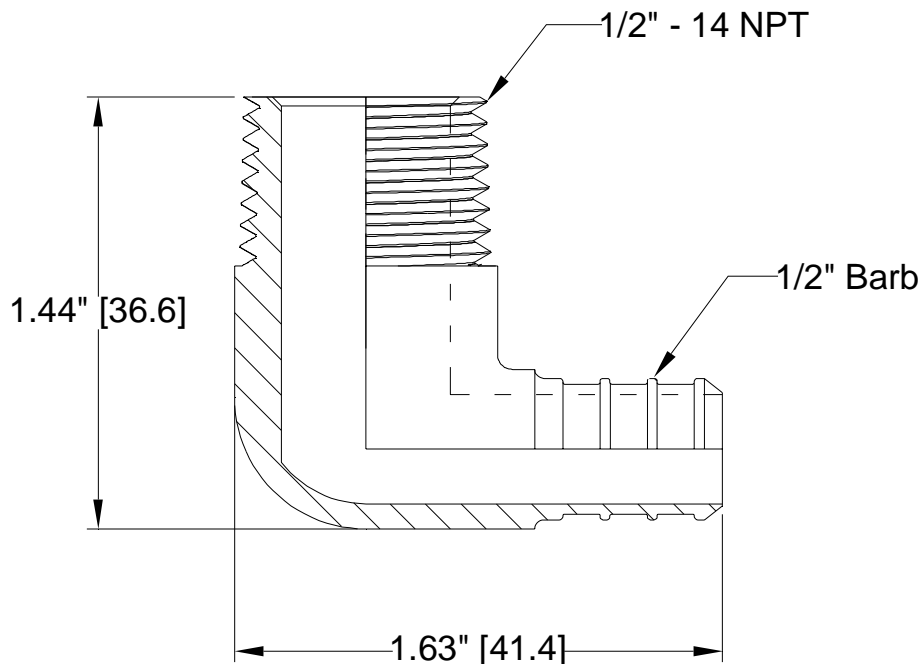

Engineering Specification: Zurn PEX® XL-Low Lead Brass Barb x MPT Elbow. The QQE33BTGX is used to make sharp 90° bends that transition from PEX pipe to a female pipe thread. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, and ASTM F1807.

Accessories

— QCLP3X	1/2" QuickClamp® Crimp Ring
— QCR3X	1/2" Copper Crimp Ring
— QS0ET3X	1/2" Stainless Steel Crimp Ring

Rev.	Date: 2/22/10	C.N. No. 110730
Dwg. No. 84484		Prod. No. QQE33BTGX