



Z1820-8S

8 x 8 [203 x 203] SQUARE INDUSTRIAL SIDE OUTLET FLOOR DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Engineering Specification: ZURN Z1820-8S

8 x 8 [203 x 203] Square, 18 gage, all type 304 (CF8) stainless steel industrial floor drain with 1.25° pre-sloped side outlet, loose set anti-tilt heavy-duty perimeter drainage cover, reinforced top frame, perforated removable sediment bucket with lift handle, and pre-pour stabilizing anchor tabs.

Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
10 [5]	6.1 [39]

Options (Check/specify appropriate options)**Pipe Size (ØA)** (Specify size/type) **Outlet**

2 [51]	___	BW	Butt-Weld (Sch. 10)
3 [76]	___	BW	Butt-Weld (Sch. 10)
4 [102]	___	BW	Butt-Weld (Sch. 10)
2 [51]	___	NH	No-Hub
3 [76]	___	NH	No-Hub
4 [102]	___	NH	No-Hub

E Body Ht. Dim.

6 [152]
6 [152]
6-1/2 [165]
6 [152]
6 [152]
6-1/2 [165]

F

3-1/2 [89]
3-1/2 [89]
3 [76]
3-1/2 [89]
3-1/2 [89]
3 [76]

Prefixes


___ Z	Type 304 (CF8) Stainless Steel*
___ ZM	Type 316 (CF8M) Stainless Steel

Suffixes

___ -B	Bell Trap/Solid Sediment Bucket
___ -P	ø1/2 [13] Trap Primer Connection
___ -SA	Stabilizer Assembly (Z1035)
___ -SQ	Stabilizer Q-Deck (Z1035-Q)
___ -TS	Top Secured Grate
___ -VH	Vacuum Handle (-GCH Cover Only)

Grate Options

___ -GCH	Heavy-Duty Gas Tight Solid Cover
___ -PCX	Extra-Heavy-Duty Perimeter Drainage Cover (6.1 Sq. In. [39 cm ²] Open Area)
___ -PGM	Medium-Duty Perforated Grate (9.9 Sq. In. [64 cm ²] Open Area)
___ -SGH	Heavy-Duty Slotted Grate (11.2 Sq. In. [72 cm ²] Open Area)
___ -SGM	Medium-Duty Slotted Grate (11.2 Sq. In. [72 cm ²] Open Area)

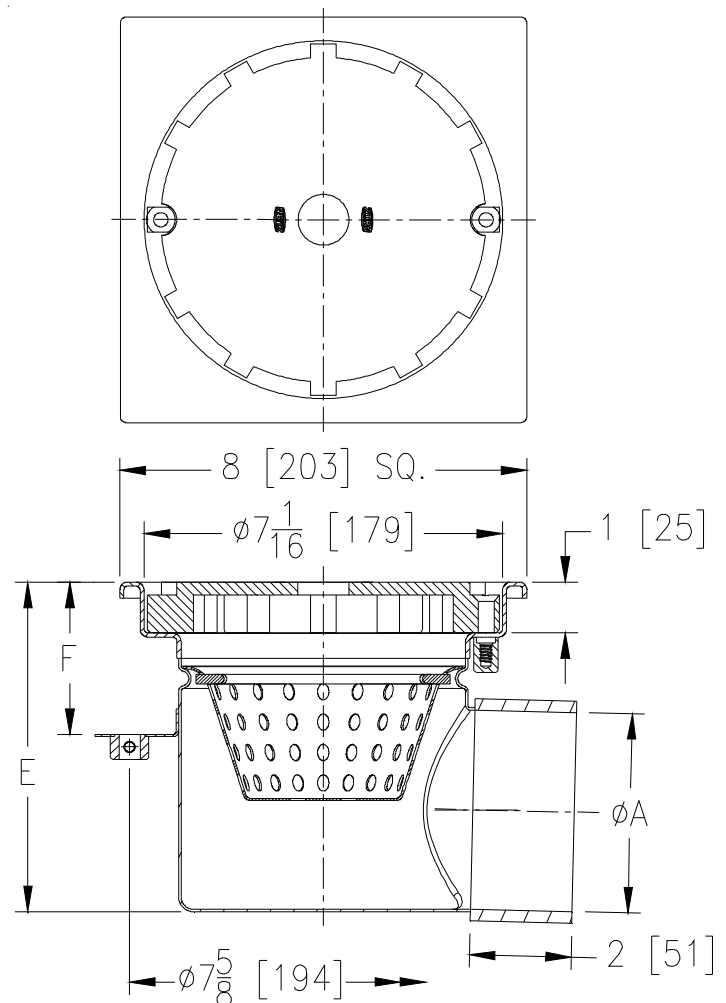

* Regularly furnished unless otherwise specified.