




Z888-36-PSF

SPECIFICATION SHEET


HI-CAP SLOTTED DRAINAGE SYSTEM WITH PRE-SLOPED
FRAME FOR 36 [914] CORRUGATED PIPE OR EQUIVALENT TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Specifying engineer is responsible for
concrete encasement and reinforcing
based upon application and local codes.

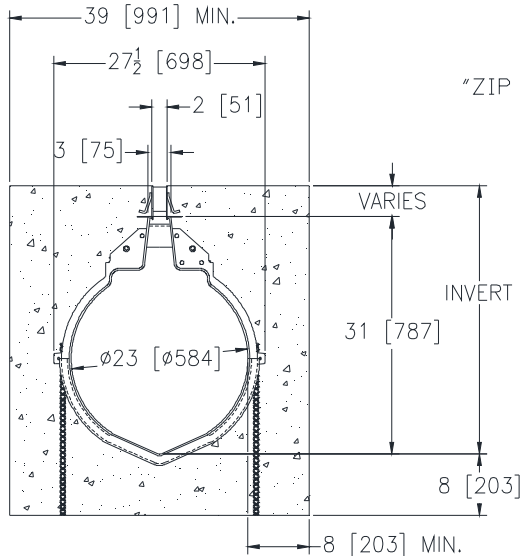

"ZIP STRIP"

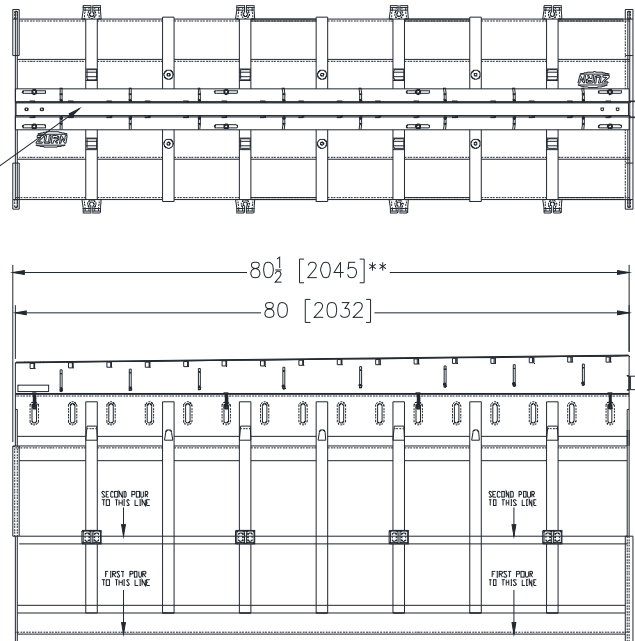

--SLOPE TO BE
SPECIFIED--

** 80 1/2 [2045] LENGTH INCLUDE
MALE/FEMALE JOINT OVERLA

ENGINEERING SPECIFICATION: Zurn Z888-36-PSF

Slotted Drain channel is 80 [2032] long, 23 [584] wide with a 1.75 [44] throat width, made from LDPE linear Low Density Polyethylene. Channels have a mechanical tongue and groove and bolted connection, mechanically lock into the concrete surround every 5 [127] along its length, channels weigh 10.2 lbs. per foot [15.2 kg per meter]. Channel has a smooth 2.5 [64] radiused bottom with a smooth .011 Manning's coefficient, and neutral non-sloping body. Top reveal is non removable and is the finish at the surface. System is anchored into the concrete with Rebar clips or physical anchors every 5 [127] to 10 [254] along the channel body. Integral Rebar Clips are standard. PSF Frame rails shall be fabricated steel conforming to ASTM 36/A36M-93a, shall have concrete anchors 0.25 [6] diameter x 3 [76] in length on 12 [305] centers to form a mechanical lock to the encasement, shall have a slope built in. Slope will be with a beginning height minimum of 2 [51], and a maximum ending height of 20 [508], overall invert range from 33 [838] to 51 [1295], shall be e-coated and meet ASTM B-117 3000 hr salt spray test, and shall be fabricated by certified welder per ASTM AWS D1.1. Minimum 2000 psi concrete encasement shall include longitudinal #4 0.5 [13] rebar along chairs on either side of the trench neck. System is capable of Supporting H-20/H-25 top load classifications.

PREFIXES

___ Z 80 [2032] Linear Low Density Polyethylene Modular Drain Channel with Integral Top Frame.*

FRAME OPTION

___ DYN Reinforcing Schedule For Higher Loading

SUFFIX OPTIONS

- ___ -E1 End Cap
- ___ -E12 12 [305] No Hub End Outlet
- ___ -E18 18 [457] No Hub End Outlet
- ___ -E24 24 [610] No Hub End Outlet
- ___ -E36 6 [914] No Hub End Outlet
- ___ -T18/36 Transition from -18 - 36 [457 - 914]

*Regularly Furnished Unless Otherwise Specified

REV. E

DATE: 08/14/13

C.N. NO. 129799

PROD. NO./DWG. NO. Z888-36-PSF

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292