


ZER6003PL-CCP-MOB

Sensor Operated Battery Powered Flush Valve For 3/4" Urinals

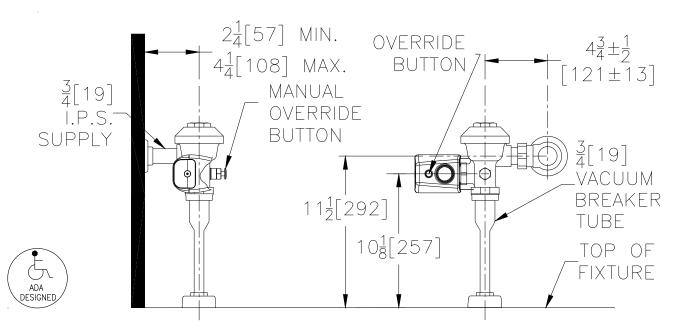

Flow Options

| □ -EWS | 0.5 gpf Extra Water Saver |
|--------|---------------------------|
|--------|---------------------------|

□ -WS1 1.0 gpf Low Consumption

□ -WS 1.5 gpf Water Saver

Accessories

| 🗆 -TFB | Triple Filtered By-pass |
|--------|-------------------------|
| □-YJ | Split Ring Pipe Support |
| □-YK | Solid Ring Pipe Support |
| □ | Other |

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC. COMMERCIAL BRASS OPERATION 5900 ELWIN BUCHANAN DRIVE SANFORD NC 27330 PHONE: 1-800-997-3876 FAX: 919-775-3541 WWW.ZURN.COM IN CANADA: ZURN INDUSTRIES LIMITED 3544 NASHUA DRIVE MISSISSAUGA, ONTARIO L4V1L2 PHONE: 905-405-8272 FAX: 905-405-1292

AquaSense[®] is a registered trademark of Zurn Industries, LLC. AquaFlush[®] is a registered trademark of Zurn Industries, LLC.

ENGINEERING SPECIFICATIONS

Exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior.

- Zurn's AquaFlush® TPE diaphragm Linear filtered by-pass
 - Chloramine resistant Dual seal
- Low lead brass alloy
- Sensor Module
 - Impact Resistant Chrome Plated Housing ADA compliant 6 VDC Motor Actuator Battery Powered Override Button
- Mechanical Manual Override Button
- Control Stop

Internal siphon-guard protection Vandal resistant stop cap Sweat solder kit

- Cast wall flange with set screw
- Vacuum Breaker High back pressure One piece hex coupling nut
- Internal seals Chloramine resistant
- Adjustable tailpiece
- Spud coupling and flange for top spud connection