




TYPICAL INSTALLATION FOR  
**Z526-C**  
FLOOR DRAIN

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

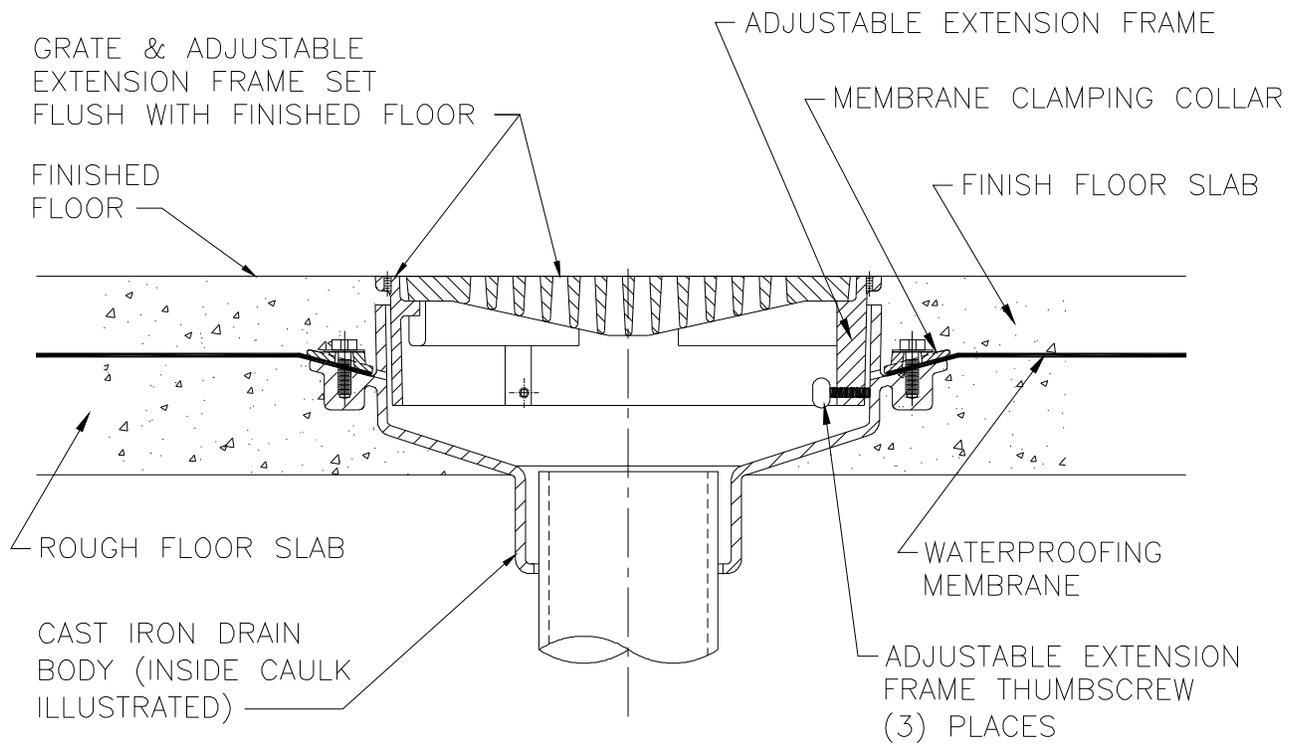

**Z526-C**  
**FLOOR DRAIN**

The Z526-C Zurn Floor Drain can be installed in most floor construction. The drain pipe is run to an elevation below the expected finished floor level, so that the drain top will be flush with (or slightly below) the finished floor. Dimensional data for all drain heights and outlet types are shown on Zurn submittal drawings. The drain body is secured to the pipe with any of four connection types: Threaded (IP), Inside Caulk (IC), Inside Gasket (IG) or the Zurn Neo-Loc (NL) Gasket. The type of connection must be specified upon ordering any Zurn drain. Once the drain is set in place, the initial concrete sub-floor is poured to an elevation level with the top of the flange on the drain body. The waterproofing membrane is then run up to and over the flange. The clamping collar is then placed on the flange and secured to seal the membrane in place. The adjustable extension frame is then positioned in the drain body with the top surface adjusted to the finish floor elevation, and is held in position by tightening the (3) thumbscrews. The finished floor is poured. Care should be taken to protect the top finish of the frame and grate during installation, through the use of cardboard, tape or other protective material applied by the plumber.

Form # FD66      Date: 03/12/10      C.N. No. 92521      Rev. -