




Z1204-N-PS-45-50

ADJUSTABLE VERTICAL SIPHON JET NO-HUB W/ PRE-FAB SLOTTED FEET, FINISHING FRAME & FLUSH VALVE SUPPORT (10 [254] DEPTH FRONT TO BACK)

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

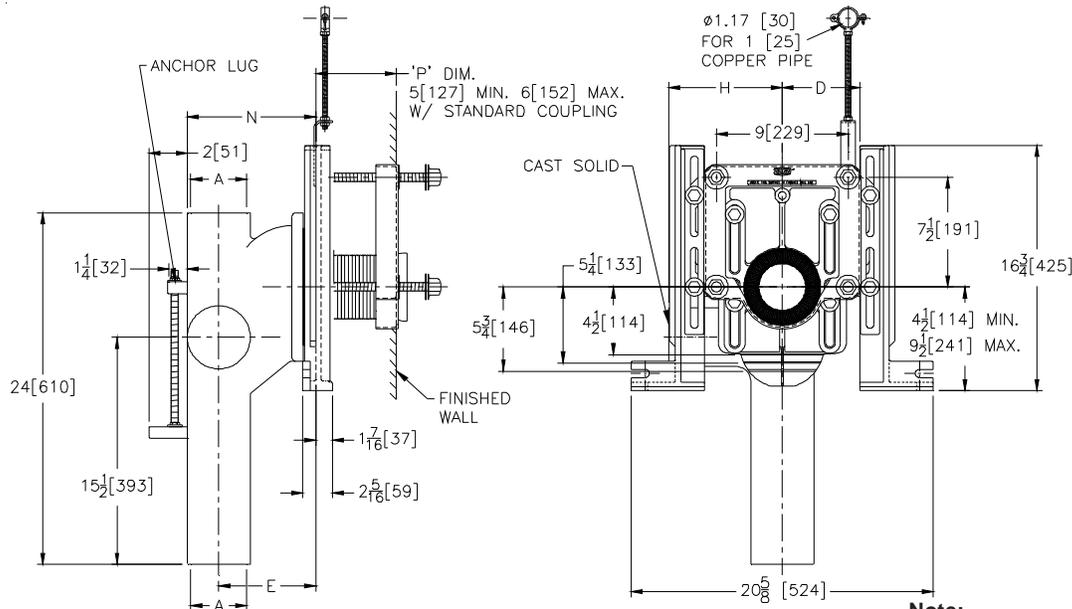

Note:

1. Min. 'P' Dim. Obtainable = 2 [51]
2. 2 [51] No-Hub vent connection regularly furnished on right hand side. Left hand available when specified (Suffix-VL)
3. Auxiliary inlet available right (-JR) or left (-JL) or both sides (-JJ) when specified.
4. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
5. Back anchor foot required for secure installation.

Product No.	Dimension in Inches					Approx. Wt. Lbs. [kg]
	A	D	E	H	N	
Z1204-N4-PS-45-50	4 [102]	5 [127]	6-5/8 [168]	5-1/2 [140]	8-7/8 [225]	80 [36]
Z1204-N5-PS-45-50	5 [127]	5-1/2 [140]	6-5/8 [168]	6-1/2 [165]	9-3/8 [238]	85 [39]
Z1204-N6-PS-45-50	6 [152]	6 [152]	7-1/8 [181]	6-1/2 [165]	10-3/8 [264]	95 [43]

ENGINEERING SPECIFICATION: ZURN Z1204-N(-)-PS-45-50

Adjustable, vertical siphon jet water closet "Rigid System" with () size No-Hub connections and () side inlets. Complete with Dura-Coated cast iron right hand, left hand, or double main fitting, with 2 [51] vent, adjustable gasketed faceplate, finishing frame, pre-fab slotted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, flush valve support, trim, and stud protectors. Rear anchor tie down and bonded "Neo-Seal" gasket.

PRODUCT/DEFINITION

___ Z1204-N()-PS-45-50 No-Hub Stack, Single Inlet, 2 [51] Right Hand Vent

PREFIXES

- ___ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
- ___ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- ___ -A Auxiliary Support Assembly (For P-Dim. Greater than 18 [457])
- ___ -B Blowout Type Fixture Support
- ___ -BC Back Cleanout
- ___ -CC Corrosion Resistant Cast Iron Coupling (6 to 12 [152] to [305])
- ___ -CL Coupling Length Greater than 12 [152] (Specify Length Required.)
- ___ -G Galvanized Cast Iron
- ___ -JJ Two 2 [51] Auxiliary Inlets
- ___ -JL 2 [51] Left-Hand Auxiliary Inlet
- ___ -JR 2 [51] Right-Hand Auxiliary Inlet
- ___ -M Auxiliary Foot Support (For P-Dim. 10-18 [254-457])
- ___ -VL Left Hand Vent Connection
- ___ -VP Vandal-Proof Trim
- ___ -X Heavy-Duty 500lb. [227 kg] Carrier Rear Anchor Tie down.
- ___ -XB Bariatric 1000 lb [454 kg] Carrier
- ___ -XH Extra-Heavy-Duty 750 lb [227 kg] Carrier
- ___ -XI 2 [51] Integral Foot Extension
- ___ -X3 3 [76] Foot Extension
- ___ -X4 4 [102] Foot Extension
- ___ -29 Mechanical Test Cap Assembly (Previously Z1210-29)
- ___ -61 "ZZ" Coupling Wrench

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 03/26/12	C.N. NO. 124104
DWG. NO. 309306	PROD. NO. Z1204-N-PS-45-50	

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814455-0921 ♦ Fax: 814454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905405-8272 Fax: 905405-1292