




# Z1902-4

12 X 12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR  
 W/ 10 [254] SUMP DEPTH & FULL GRATE W/  
 2 [51] DIAMETER ROUND CENTER OPENING

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

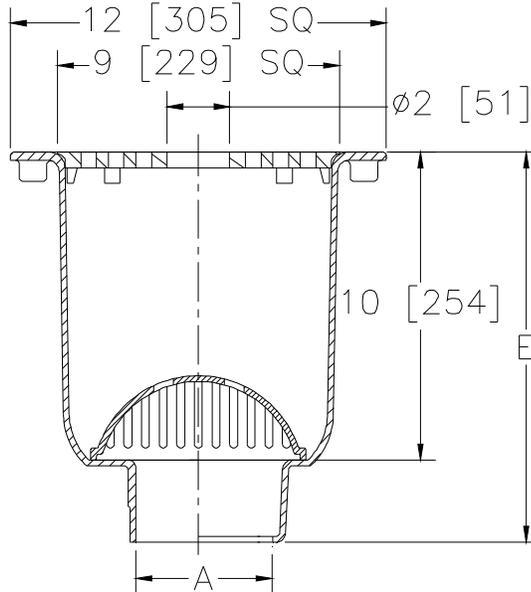

A- Pipe Size In. [mm]	Approx Wt. Lbs.[kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2,3,4 [51,76,102]	36 [13]	32 [206]

**ENGINEERING SPECIFICATION: ZURN Z1902-4**

Sani-Flor receptor 12" x 12" x 10" [305mm x 305mm x 254mm] deep cast iron body and full grate with 2 [51] diameter round center opening, with white acid resisting porcelain enamel interior and top, and black ground enamel exterior coating, complete with ABS anti-splash interior bottom dome strainer.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 3, 4 [76, 102]
- 2, 3, 4 [51, 76, 102]
- 2, 3, 4 [51, 76, 102]

(Specify size/type) **OUTLET**

- \_\_\_ IC Inside Caulk
- \_\_\_ NH No-Hub
- \_\_\_ NL Neo-Loc

**'E' BODY HT. DIMENSION**

Z	ZN / ZS
12-5/8 [321]	13-1/8 [333]
12-5/8 [321]	13-1/8 [333]
12 [305]	12-1/2 [318]

**PREFIXES**

- \_\_\_ Z Cast Iron Body w/ White A.R.E. Interior\*
- \_\_\_ ZN Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Nickel Bronze Frame and Full Grate with 3-1/32 [77] Square Center Opening
- \_\_\_ ZS Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and Full Grate with 3-1/32 [77] Square Center Opening

**SUFFIXES**

- |  |   |
|--|---|
| ___ -DX Dex-O-Tex Flange (ZN Only)   | ___ -VPS Vandal-Proof Strainer  |
| ___ -HD Stainless Steel Frame w/ Extra-Heavy Duty<br>Stainless Steel Grate (ZS Only) | ___ -6 Grate w/ 6 [152] dia. x 6 [152] High Funnel                        |
| ___ -HP Heel-Proof Grate (ZN Only)   | ___ -8 Grate w/ 8-7/8 x 3-5/8 x 3-3/4<br>[225 x 92 x 95] High Oval Funnel |
| ___ -K Anchor Flange   | ___ -11 Vandal-Proof Secured Grate (ZN & ZS Only)                         |
| ___ -KC Anchor Flange w/ Seepage Holes and<br>Clamp Collar                           | ___ -23 Aluminum Bucket   |
| ___ -LD Less Bottom Dome Strainer  | ___ -25 White A.R.C. Bucket   |
| ___ -P 1/2 [13] Trap Primer Connection (See Z1023)                                   | ___ -31 Stainless Steel Mesh Liner for Bucket                             |
| ___ -SA Stabilizer Assembly (See Z1903)  | ___ -32 Aluminum Dome Strainer  |
| ___ -TC Neo-Loc Test Cap Gasket<br>(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)     | ___ -33 White A.R.C. Anti-Splash Bottom Dome Strainer                     |

\* Regularly furnished unless otherwise specified.