




Z1902-LD

12 X 12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR
w/ 10 [254] SUMP DEPTH (LESS) BOTTOM DOME STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

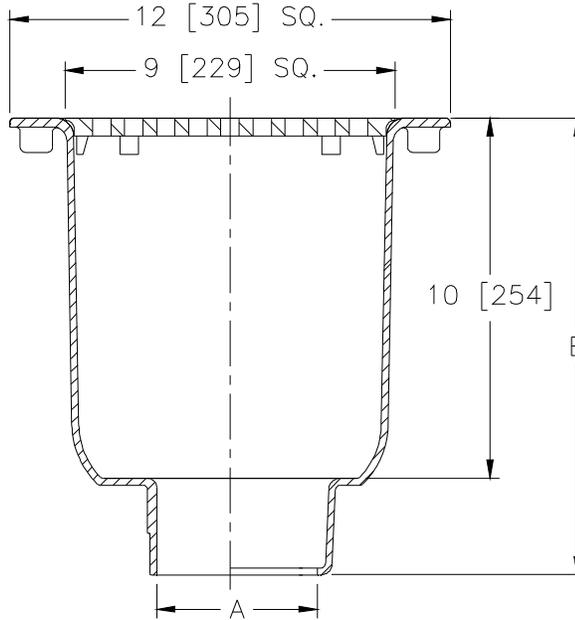

A - Pipe Size In. [mm]	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2, 3, 4 [51, 76, 102]	36 [13]	31 [200]

ENGINEERING SPECIFICATION: ZURN Z1902-LD

Sani-Flor Receptor 12" x 12" x 10" [305mm x 305mm x 254mm] Deep cast iron body and square slotted light duty grate, with white acid resisting porcelain enamel interior and top, and black ground enamel exterior coating, complete with less bottom dome strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 3, 4 [76, 102]
- 2, 3, 4 [51, 76, 102]
- 2, 3, 4 [51, 76, 102]

(Specify size/type) OUTLET

- ___ IC Inside Caulk
- ___ NH No-Hub
- ___ NL Neo-Loc

'E' BODY HT. DIMENSION

Z	ZN / ZS
12-5/8 [321]	13-1/8 [333]
12-5/8 [321]	13-1/8 [333]
12 [305]	12-1/2 [318]

PREFIXES

- ___ Z Cast Iron Body w/ White A.R.E. Interior*
- ___ ZN Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square N.B. Frame and Full Grate w/ 1/2 [13] Openings (Add 1/2 [13] to 12 [305] Dim.)
- ___ ZS Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and Full Grate w/ 1/2 [13] Openings (Add 1/2 [13] to 12 [305] Dim.)

SUFFIXES

- | | | | |
|----------|--|---------|--|
| ___ -DX | Dex-o-Tex Flange (ZN Only) | ___ -1 | (Less) Grate |
| ___ -HD | Stainless Steel Frame w/ Extra-Heavy Duty
Stainless Steel Grate (ZS Only) | ___ -2 | 1/2 Grate |
| ___ -HP | Heel-Proof Grate (ZN Only) | ___ -3 | 3/4 Grate |
| ___ -K | Anchor Flange | ___ -4 | Full Grate w/ Center Opening (2 [51] Dia. for Z)
and (3-1/32 [77] Square for ZN & ZS) |
| ___ -KC | Anchor Flange w/ Seepage Holes and Clamp Collar | ___ -6 | Grate w/ 6 [152] Dia. x 6 [152] High Funnel |
| ___ -P | 1/2 [13] Trap Primer Connection (See Z1023) | ___ -8 | Grate w/ 8-7/8 x 3-5/8 x 3-3/4 [225 x 92 x 95]
High Oval Funnel |
| ___ -SA | Stabilizer Assembly (See Z1903) | ___ -11 | Vandal-Proof Secured Grate (ZN & ZS Only) |
| ___ -TC | Neo-Loc Test Cap Gasket
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only) | ___ -15 | Solid Loose Set Cover (Z & ZN Only) |
| ___ -VPS | Vandal-Proof Strainer | ___ -19 | Full Hinged Grate (ZN Only) |

* Regularly furnished unless otherwise specified.