




Z1970-P

9 [229] DIAMETER SHALLOW A.R.C. SANI-FLOOR
RECEPTOR 3 [76] SUMP DEPTH WITH 1/2 N.P.T.
TRAP PRIMER CONNECTION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

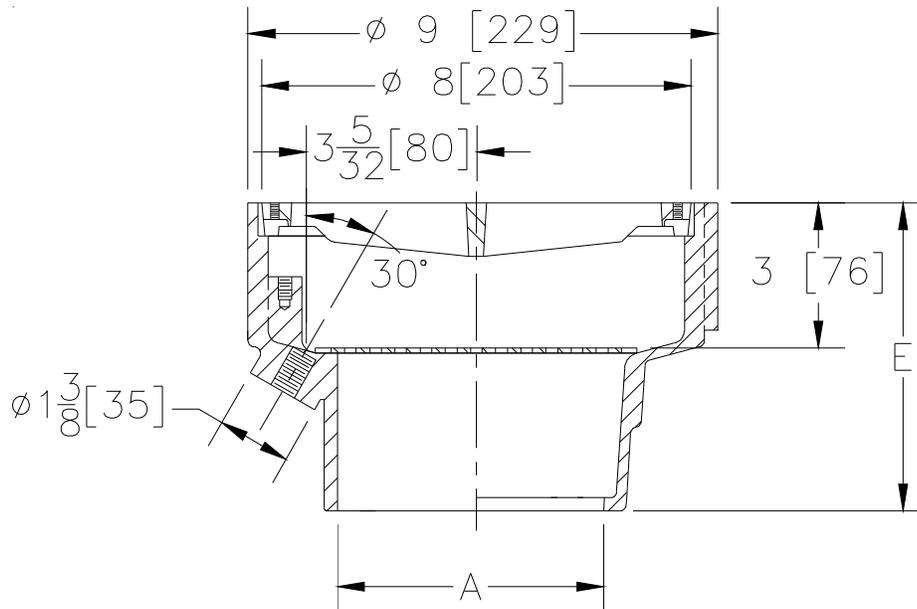

A Pipe Size In. [mm]	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	14 [6]	18 [116]

ENGINEERING SPECIFICATION: ZURN Z1970-P
Sani-Floor receptor 9" [229mm] diameter x 3" [76mm] deep cast iron body with 1/2" N.P.T. trap primer connection and round slotted medium duty grate, with white acid resisting coated interior and top, complete with brass secondary strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

(Specify size/type) **OUTLET**

'E' BODY HT. DIMENSION

2,3,4 [51,76,102]
2,3,4 [51,76,102]

___ NH No-Hub
___ NL Neo-Loc

Z	ZN
5-3/4 [146]	6 [152]
4-7/8 [124]	5-1/8 [130]

PREFIXES

- ___ Z Cast Iron Body with White A.R.C. Interior*
- ___ ZN Cast Iron Body with White A.R.C. Interior, 9 [229] Round Nickel Bronze Frame and Full Slotted Grate

SUFFIXES

- | | |
|--|--|
| ___ -K Anchor Flange with Seepage Holes | ___ -5 Grate w/ 4 [102] Diameter x 3-3/4 [95] High Funnel |
| ___ -KC Anchor Flange with Seepage Holes and Clamp Collar | ___ -7 Grate w/ 6-3/4 x 3 x 1 [171 x 76 x 25] High Oval Funnel |
| ___ -TC Neo-Loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only) | ___ -11 Vandal Proof Secured Grate |
| ___ -2 1/2 Grate | ___ -25 White A.R.C. Bucket |
| ___ -3 3/4 Grate | ___ -31 Stainless Steel Mesh Liner for Bucket |
| ___ -4 Full Grate With 2 [51] Diameter Center Opening | |

* Regularly furnished unless otherwise specified.