




# Z1207-N-B

## ADJUSTABLE HORIZONTAL HIGH ROUGH-IN BLOWOUT- NO-HUB

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

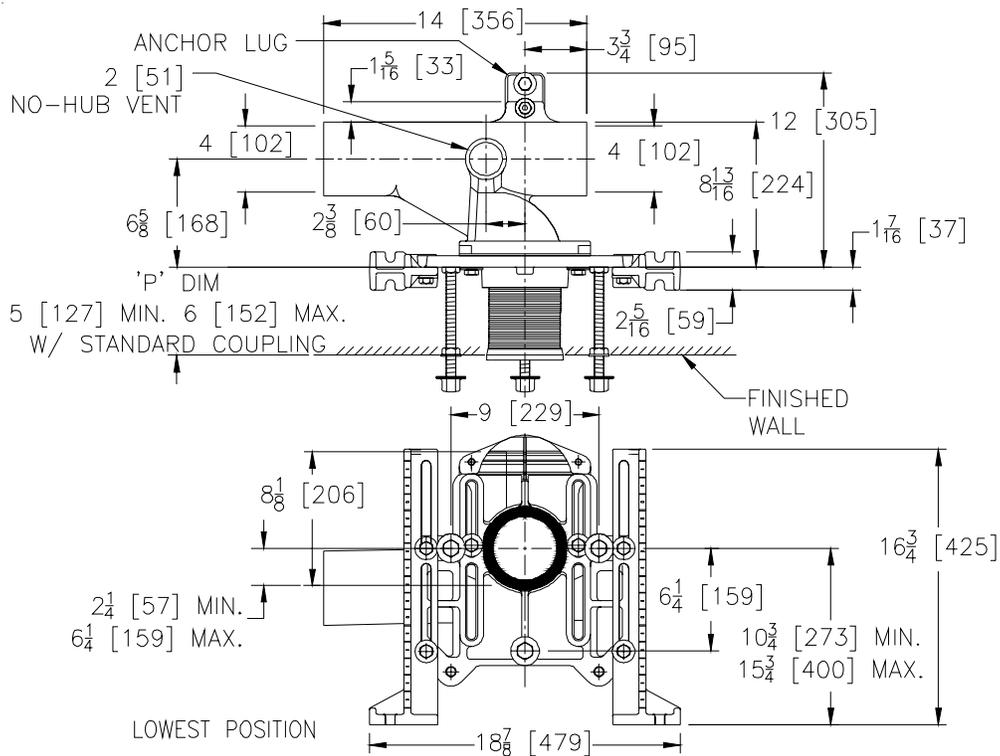

Product Numbers	Approx Wt. Lbs [kg]
Z1207-NL4	87 [39]
Z1207-NR4	87 [39]
Z1207-ND4	106 [48]

**ENGINEERING SPECIFICATION:** ZURN Z1207-N(-)B Adjustable, horizontal, high rough-in blowout water closet "Rigid System" with 4 [102] No-Hub connections. Complete with Dura-Coated cast iron right hand, left hand, or double main fitting, with 2 [51] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down and bonded "Neo-Seal" gasket.

Note: 13 1/2 [343] Minimum space required between front of foot and rear of anchor to install Z1207-N4 Series.

**OPTIONS** (Check/specify appropriate options)

- Z1207-NR4-B** 4 [102] No-Hub Right Hand Inlet with Flow to Left
- Z1207-NL4-B** 4 [102] No-Hub Left Hand Inlet with Flow to Right
- Z1207-ND4-B** 4 [102] No-Hub Back to Back Inlet (Double)

**PREFIXES**

- \_\_\_ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling\*
- \_\_\_ ZQ D.C.C.I. System with NPT Face Plate, Non-Adjustable Coupling

**SUFFIXES**

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>___ -A Auxiliary Support Assembly<br/>(For P-Dim. Greater than 18 [457])</li> <li>___ -BC Back Cleanout</li> <li>___ -CC Corrosion Resistant Cast Iron Coupling<br/>(6 to 12 [152] to [305])</li> <li>___ -CL Coupling Length Greater than 12 [152]<br/>(Specify Length Required)</li> <li>___ -F Floor Mount, Back Outlet Fixture Support</li> <li>___ -G Galvanized Cast Iron</li> <li>___ -M Auxiliary Foot Support<br/>(For P-Dim. 10-18 [254-457])</li> <li>___ -T Threaded Connection<br/>(Available on Restricted Basis Only)</li> <li>___ -VP Vandal-Proof Trim</li> </ul> | <ul style="list-style-type: none"> <li>___ -W Adapter for Women's Urinal</li> <li>___ -XH Extra-Heavy-Duty 500 lb [227 kg] Carrier</li> <li>___ -X3 3 [76] Foot Extension</li> <li>___ -X4 4 [102] Foot Extension</li> <li>___ -29 Mechanical Test Cap Assembly<br/>(Previously Z1210-29)</li> <li>___ -45 Finishing Frame for Siphon Jet System (For Blowout System Specify -45-B) (Previously Z1210-45)</li> <li>___ -50 Flush Valve Supply Support for W.C.<br/>(Previously Z1210-50)</li> <li>___ -61 "ZZ" Coupling Wrench</li> </ul> |
|---|---|

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

<b>REV. B</b>	<b>DATE: 4/28/05</b>	<b>C.N. NO. 92968</b>
<b>DWG. NO. 62042</b>	<b>PRODUCT NO. Z1207-N-B</b>	