




Z610-F-S

12-1/2 [318] SQUARE TOP HEAVY-DUTY DRAIN
W/ EXTENSION & SECONDARY STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

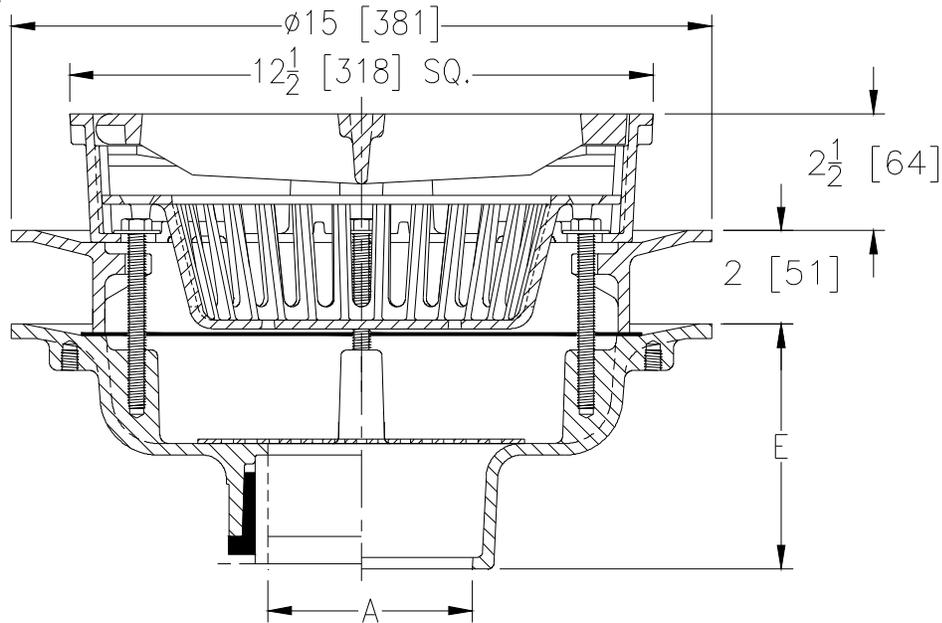

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2, 3, 4, 6 [51, 76, 102, 152]	54 [24]	42 [271]
8 [203]	56 [25]	

ENGINEERING SPECIFICATION: ZURN Z610-F-S

12-1/2" [318mm] Square top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for heavy-duty cast iron loose slotted grate, with suspended polypropylene sediment bucket, 2" [51mm] static extension, and secondary strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3, 4, 6, [76, 102, 152]

3, 4, 6 [76, 102, 152]

2, 3, 4, 6, [51, 76, 102, 152]

2, 3, 4, 6, 8 [51, 76, 102, 152, 203]

2, 3, 4 [51, 76, 102]

(Specify size/type) **OUTLET**

___ IC Inside Caulk

___ IG Inside Caulk

___ IP Threaded

___ NH No-Hub

___ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]

5-1/4 [133]

3-3/4 [95]

5-1/4 [133]

4-5/8 [117]

PREFIXES

___ Z D.C.C.I. Body and Top*

___ ZB D.C.C.I Body w/ Polished Bronze Top (Add 3/16 [5] to 2-1/2 [64] Dim. and 3/4 [19] to 12-1/2 [318] Dim.)

___ ZN D.C.C.I Body w/ Polished Nickel Bronze Top (Add 3/16 [5] to 2-1/2 [64] Dim. and 3/4 [19] to 12-1/2 [318] Dim.)

SUFFIXES

___ -AR Acid Resistant Epoxy Coated Finish

___ -DG Duresist Grate

___ -DS Ductile Iron Solid Cover

___ -DX Dex-o-tex Flange

___ -G Galvanized Cast Iron

___ -H Hinged Grate

___ -HC Hinged Solid Cover

___ -HL Hinged Locking Grate

___ -HLC Hinged Locking Cover

___ -LY (Less) Sediment Bucket

___ -P Trap Primer Connection

___ -SC Solid Cover

___ -SS Stainless Steel Mesh Liner For Bucket

___ -TC Neo-Loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only)

___ -TS Top Secured with Slotted Screws

___ -V Backwater Valve (See Z1099)

___ -VP Vandal-Proof Secured Top

___ -YA Aluminum Sediment Bucket

___ -YC Cast Iron Sediment Bucket

___ -90 90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified.