




Z508-SG

9 [229] DIAMETER HEAVY DUTY DRAIN W/ SOLID GASKETED COVER W/ LIFT HANDLE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

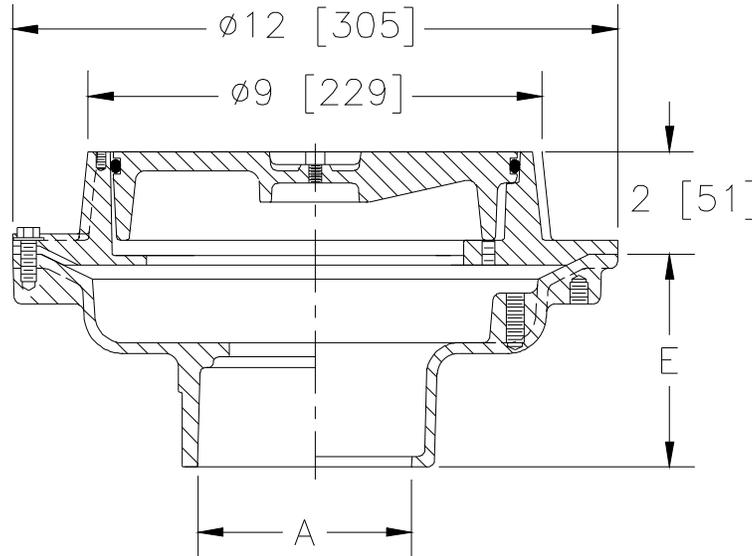

| A- Pipe Size In.[mm] | Approx. Wt. Lbs. [kg] |
|-------------------------|-----------------------------|
| 2,3,4 [51,76,102] | 21 [10] |
| 6 [152] | 25 [11] |

ENGINEERING SPECIFICATION: ZURN Z508-SG

9" [229mm] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for heavy duty solid gasketed cover with lift handle.

OPTIONS (Check/specify appropriate options)

| PIPE SIZE | (Specify size/type) OUTLET | 'E' BODY HT. DIM. |
|-----------------------|----------------------------|-------------------|
| 4 [102] | ___ IC Inside Caulk | 3-3/4 [95] |
| 4 [102] | ___ IG Inside Gasket | 3-3/4 [95] |
| 4 [102] | ___ IP Threaded | 2-3/4 [70] |
| 2, 3, 4 [51, 76, 102] | ___ NH No-Hub | 4-3/4 [121] |
| 6 [152] | ___ NH No-Hub | 5-1/4 [133] |
| 2, 3, 4 [51, 76, 102] | ___ NL Neo-Loc | 3-1/2 [89] |

PREFIXES

- ___ Z D.C.C.I. Body and Cover*
- ___ ZB D.C.C.I. Body with Polished Bronze Cover (Add 3/16 [5] to 2 [51] Dim.)
- ___ ZN D.C.C.I. Body with Polished Nickel Bronze Cover (Add 3/16 [5] to 2 [51] Dim.)

SUFFIXES

- ___ -AR Acid Resisting Epoxy Coated Cast Iron
- ___ -G Galvanized Cast Iron
- ___ -P Trap Primer Connection
- ___ -S Secondary Strainer
- ___ -TC Neo-Loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only)
- ___ -TS Top Secured With Slotted Screws
- ___ -VP Vandal Proof Secured Top
- ___ -90 90° Threaded Side Outlet Body
(4 [102] IP only)

* Regularly furnished unless otherwise specified.