


## Z1203-N-XI

## ADJUSTABLE HORIZONTAL SIPHON JET NO-HUB W/INTEGRAL 2 [51] EXTENSION FEET

SPECIFICATION SHEET	•
TAG	

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

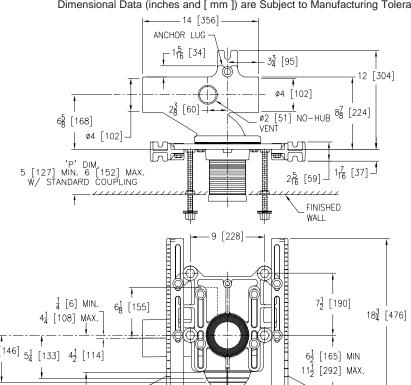

 $18\frac{7}{8}$  [479]

Product Number	Approx. Wt. Lbs. [kg]		
Z1203-NL4-XI	70 [32]		
Z1203-NR4-XI	70 [32]		

## Note:

- 1. Min. 'P' Dim. Obtainable=2 [51]
- 2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
- 3. Back anchor foot required for secure installation.

PRODUCT NO. Z1203-N-XI

## ENGINEERING SPECIFICATION: ZURN Z1203-N()-XI

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

Adjustable, horizontal siphon jet water closet "Rigid System" with 4 [102] No-Hub connections. Complete with Dura-Coated cast iron right hand, left hand, or double main fitting, with 2 [51] vent, adjustable gasketed faceplate, integral 2 [51] extension floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down and bonded "Neo-Seal" gasket.

	3						
Z12		appropriate options) 4 [102] No-Hub Right H 4 [102] No-Hub Left Ha					
PREFIXESZZQ	•	m with Zurn "ZZ" Adjust m with NPT Faceplate,		Coupling			
-CC -CL -CV -G -T -VP -X3	Back Cleanou Corrosion Re (6 - 12 [152 - Coupling Lend (Specified Lend Closed Vent (Galvanized Control Control Threaded Control Contro	sistant Cast Iron Coupl 305]) gth Greater Than 12 [30 ngth Required) 'Use only when local co ast Iron nnection	05]	45 50 61	(for Blow Out Sys	stem speci oly Support	fy -45-B)
29		est Cap Assembly		REV A	DATF: 2/24	 1/11	C N NO 1209

DWG. NO. 83141