


Z1203-N-45

ADJUSTABLE HORIZONTAL SIPHON JET NO-HUB W/FINISHING FRAME

SP	E	ĴΓ	IC	AΤ	Ю	Ν	SH	IEE	: 1

TA			
IA	G		

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

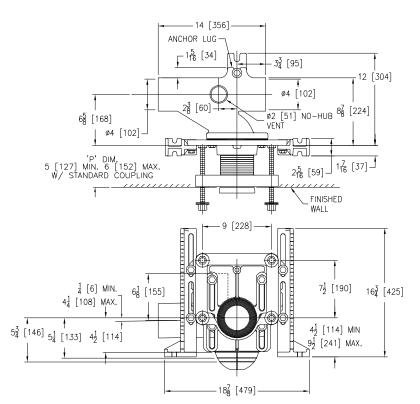

Product Number	Approx. Wt. Lbs. [kg]
Z1203-NL4-45	67 [30]
Z1203-NR4-45	07 [30]

Note:

- 1. Min. 'P' Dim. Obtainable = 2 [51] with cut standard coupling
- Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
- 3. Back anchor foot required for secure installation.

ENGINEERING SPECIFICATION: ZURNZ1203-N()4-45

Adjustable, horizontal siphon jet water closet "Rigid System" with 4" [102mm] No-Hub connections. Complete with Dura-Coated cast iron right or left hand main fitting, with 2" [51mm] vent, adjustable gasketed faceplate, universal floor mounted foot supports, finishing frame, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, stud protectors, rear anchor tie down and bonded "Neo-Seal" gasket.

Z120	neck/specify appropriate options) 3-NR4-45 4 [102] No-Hub Right Hand Inlet with Flow 3-NL4-45 4 [102] No-Hub Left Hand Inlet with Flow to		
PREFIXES Z ZQ	D.C.C.I. System with Zurn "ZZ" Adjustable Coupling* D.C.C.I. System with NPT Faceplate, Non-Adjustable	Coupling	
SUFFIXES	Auxiliary Support Assembly (for 'P' Dim. Greater Than 18 [457]) Blowout Type Fixture Support Corrosion Resistant Cast Iron Coupling (6 - 12 [151- 305]) Coupling Length Other Than Standard 6 [152] (Specify Length Required) Auxiliary Foot Support (for 'P' Dim. 10 -18 [254 - 457]) Pre-Fab Foot		Pre-Fab Slotted Foot Unistrut Pre-Fab Foot Vandal-Proof Trim 3 [76] Foot Extension Assembly (See Z1200-FT-EXT-3) 4 [102] Foot Extension Assembly (See Z1200-FT-EXT-4) Flush Valve Supply Support for Water Closets (See Z1200-SPRT-SPLY-WC)

Prod. | Dwg. No. Z1203-N-45

^{*} Regularly furnished unless otherwise specified.