




# ZS1902-4

12x12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR  
 W/ 10 [254] SUMP DEPTH AND STAINLESS STEEL FRAME  
 AND GRATE W/ 3-1/32 [77] SQUARE CENTER OPENING

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

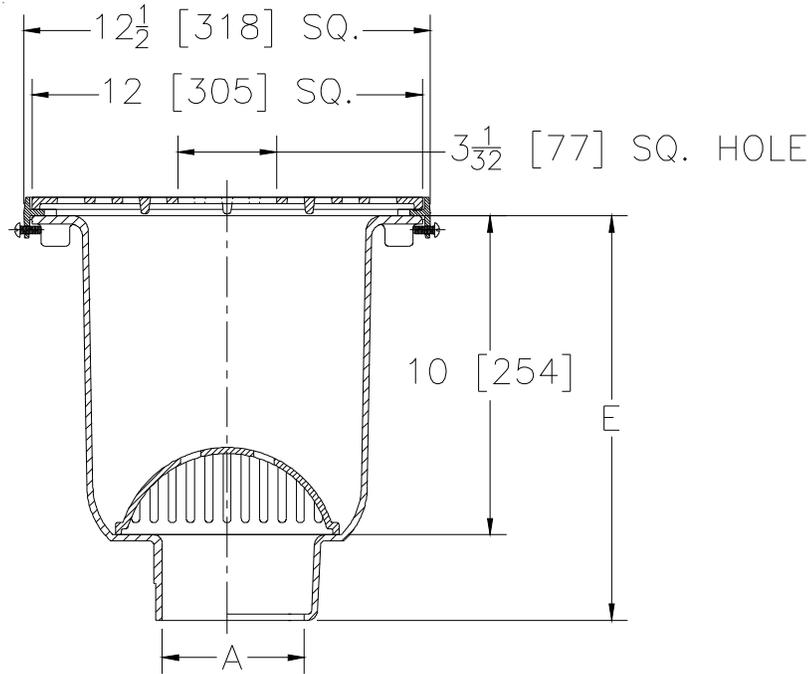

A Pipe Size In. [mm]	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2, 3, 4 [51, 76, 102]	36 [13]	32 [206]

### ENGINEERING SPECIFICATION: ZURN ZS1902-4

Sani-Flor Receptor 12" x 12" x 10" [305mm x 305mm x 254mm] Deep cast iron body with white acid resisting porcelain enamel interior, black ground enamel exterior coating, with stainless steel grate with 3-1/32" [77mm] square center opening, complete with ABS anti-splash interior bottom dome strainer.

### OPTIONS (Check/specify appropriate options)

#### PIPE SIZE

- 3, 4 [76, 102]
- 2, 3, 4 [51, 76, 102]
- 2, 3, 4 [51, 76, 102]

#### (Specify size/type) OUTLET

- \_\_\_ IC Inside Caulk
- \_\_\_ NH No-Hub
- \_\_\_ NL Neo-Loc

#### 'E' BODY HT. DIMENSION

Z	ZN / ZS
12-5/8 [321]	13-1/8 [333]
12-5/8 [321]	13-1/8 [333]
12 [305]	12-1/2 [318]

#### PREFIXES

- \_\_\_ ZS Cast Iron Body with White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and Full Grate with 3-1/32 [77] Square Center Opening

#### SUFFIXES

- |         |   |          |   |
|---------|---|----------|---|
| ___ -HD | Stainless Steel Frame w/ Extra Heavy Duty     | ___ -VPS | Vandal-Proof Strainer                         |
|         | Stainless Steel Grate                         | ___ -11  | Vandal-Proof Secured Grate (ZN & ZS Only)     |
| ___ -K  | Anchor Flange with Seepage Holes              | ___ -23  | Aluminum Bucket                               |
| ___ -KC | Anchor Flange with Seepage Holes and          | ___ -25  | White A.R.C. Bucket                           |
|         | Clamp Collar                                  | ___ -31  | Stainless Steel Mesh Liner for Bucket         |
| ___ -LD | Less Bottom Dome Strainer                     | ___ -32  | Aluminum Dome Strainer                        |
| ___ -P  | 1/2 [13] Trap Primer Connection (See Z1023)   | ___ -33  | White A.R.C. Anti-Splash Bottom Dome Strainer |
| ___ -SA | Stabilizer Assembly (See Z1903)               |          |   |
| ___ -TC | Neo-Loc Test Cap Gasket                       |          |   |
|         | (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only) |          |   |

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
 In Canada | Zurn Industries Limited  
 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. B  
 Date: 10/13/2017  
 C.N. No. 138791  
 Prod. | Dwg. No. ZS1902-4