




Z1172-E-HD

LARGE CAPACITY GREASE INTERCEPTOR W/ EXTENSION & HEAVY-DUTY COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

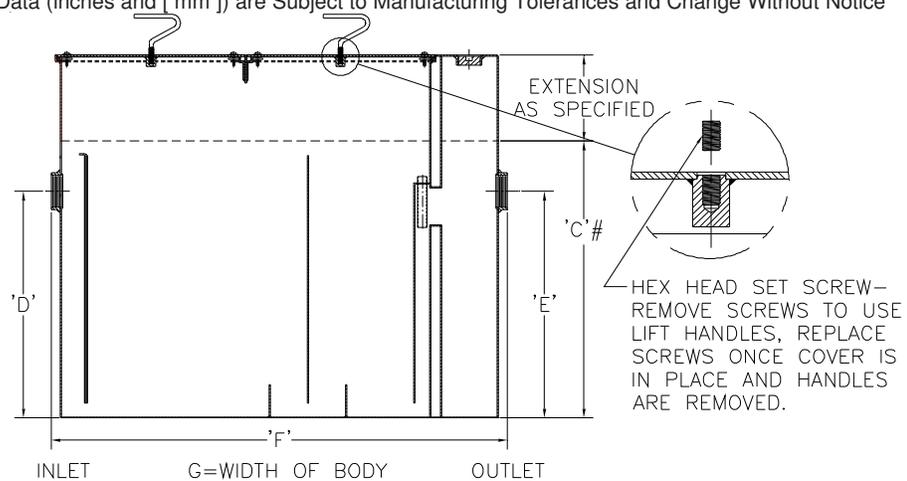

Size	Inlet/ Outlet Size**	Flow Rate GPM. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C #	D/E	F	G
900	3 [76]	75 [284]	65 [246]	150 [68]	1	316 [143]	25-3/4 [654]	18-1/2 [470]	36 [914]	28-5/8 [727]
1000		100 [378]	110 [416]	200 [91]		408 [185]	30 [762]	23 [584]	42-3/4 [1086]	33-5/8 [854]
1100		125 [472]	150 [567]	250 [114]		749 [340]	33-1/8 [841]	24-1/2 [622]	49-1/4 [1251]	40 [1016]
1200	4 [102]	150 [567]	195 [737]	300 [136]	2	856 [389]	33-3/4 [857]	25-1/4 [641]	56 [1422]	41-5/8 [1057]
1300		200 [756]	270 [1021]	400 [182]		1016 [461]	38-1/2 [978]	29-7/8 [759]	61 [1549]	43-5/8 [1108]
1400	5 [127]	250 [945]	465 [1758]	500 [227]	2	1384 [628]	44 [1118]	36 [914]	71 [1803]	51-5/8 [1311]
1500		300 [1134]	665 [2514]	600 [272]		1770 [804]	49-1/4 [1251]	39-5/8 [1006]	80 [2032]	58-5/8 [1489]
1600	6 [152]	350 [1323]	865 [3278]	700 [318]	3	2096 [951]	53-1/2 [1359]	43-7/8 [1114]	87 [2210]	63-5/8 [1616]
1700		400 [1512]	1095 [4139]	800 [363]		2440 [1108]	57-1/4 [1454]	47-5/8 [1210]	94 [2388]	67 [1702]
1800		450 [1701]	1280 [4838]	900 [409]		2710 [1230]	58-1/4 [1480]	48-5/8 [1235]	100 [2540]	72 [1829]
1900		500 [1890]	1440 [5443]	1000 [454]		2857 [1297]	60-1/4 [1530]	51-5/8 [1311]	104 [2642]	74 [1880]

ENGINEERING SPECIFICATION: ZURN Z1172-E-HD

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ___ GPM and ___ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid heavy-duty secured cover rated at 10,000 lbs. [4536 kg.] maximum load with removable lift handles, complete with flow control fitting. Acid resistant coated interior and exterior fabricated steel extension section built integral to the interceptor body (Specify "C" Dimension Required). Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

'C' Dim's shown are standard interceptor heights. Add extension height needed to obtain overall 'C' as specified

SUFFIXES

- ___ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. (A 3 [76] minimum Extension Height is required when Anchor Flange (-K) Option is specified.)
- ___ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. (A 3 [76] minimum Extension Height is required when Anchor Flange (-KC) Option is specified.)
- ___ -L Angle type (Z1108-L) flow control device.
- ___ -PW Plug Wrench

* Regularly furnished unless otherwise specified.