




Z1186-HD-KC

OIL INTERCEPTOR WITH HEAVY-DUTY COVER,
ANCHOR FLANGE AND CLAMP COLLAR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

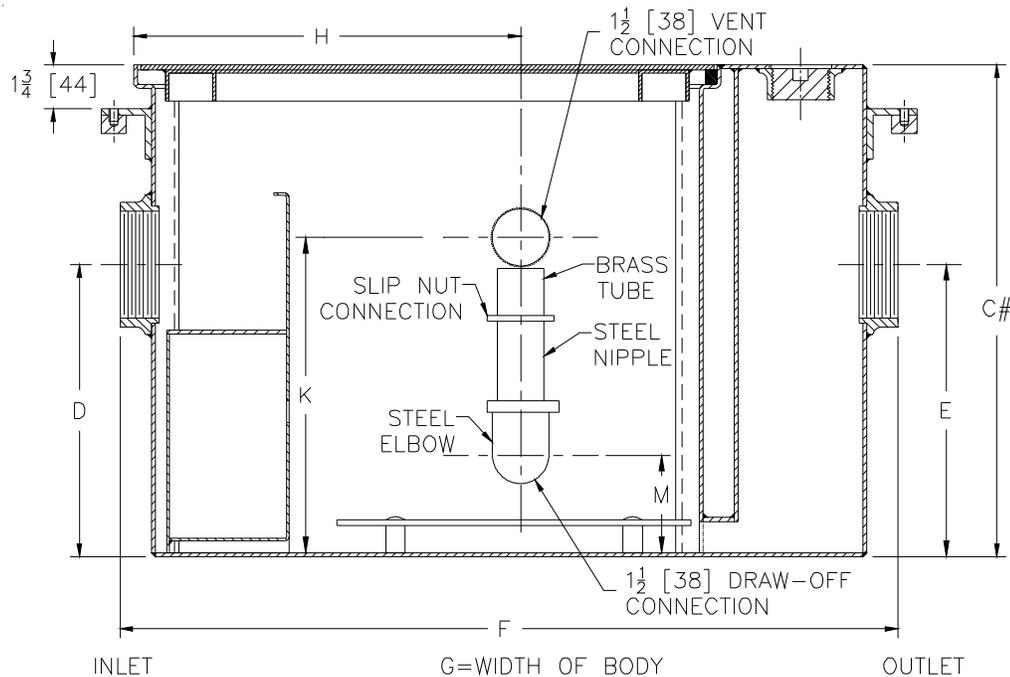

Size	Inlet/ Outlet Size** In [mm]	Flow Rate GPM [LPM]	Water Cap. Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]						
					#C	D/E	F	G	H	K	M
300	2 [51]	10 [38]	7 [26]	56 [25]	16-5/8 [422]	8-1/8 [206]	25-1/8 [638]	14 [356]	11-5/8 [295]	11 [279]	2-3/4 [70]
400	2 [51]	15 [57]	9 [34]	77 [35]	17 [432]	8-1/4 [210]	25-1/4 [641]	14-1/8 [359]	11-5/8 [295]	11 [279]	2-3/4 [70]
500	3 [76]	20 [76]	10 [38]	106 [48]	18-1/2 [470]	9-3/8 [238]	27-1/8 [689]	16-3/4 [425]	13-1/4 [336]	12-1/2 [318]	2-1/2 [64]
600	3 [76]	25 [94]	16 [60]	116 [53]	21-1/4 [540]	11-3/4 [298]	30 [762]	17-1/4 [438]	16 [406]	15-1/4 [387]	4 [102]
700	3 [76]	35 [132]	21 [79]	140 [64]	22-3/4 [578]	12-1/2 [318]	32-1/4 [819]	19-7/8 [505]	16-3/8 [416]	16-3/4 [425]	4-11/16 [119]
800	3 [76]	50 [189]	30 [113]	171 [78]	27-1/4 [692]	14-1/4 [362]	34-1/8 [867]	22-1/2 [572]	17-1/4 [438]	21-1/4 [540]	6-7/16 [164]

ENGINEERING SPECIFICATION: ZURN Z1186-HD-KC

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side, secured gasketed non-skid heavy-duty traffic cover rated at 10,000 lbs. [4536 kg.] max. safe live load, complete with flow control fitting. Regularly furnished with inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___-E Acid Resistant Coated Interior and exterior fabricated steel extension section.
(Specify 'C' Dim. required) for recessed installation.
___-PW Plug Wrench (Z1470-PW)

**Inlet and outlet sizes shown indicate standard operating sizes and flow control setting. Size #300 and #400 will have 3 [76] connections reduced to 2 [51] standard. Size #700 and #800 will have 4 [102] connections reduced to 3 [76] as standard.

* Regularly furnished unless otherwise specified.