



Z1201-H_4-RYK17

17 [432] ONE PIECE RYK FOOT SUPPORT


EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE

SIPHON JET HUB AND SPIGOT WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

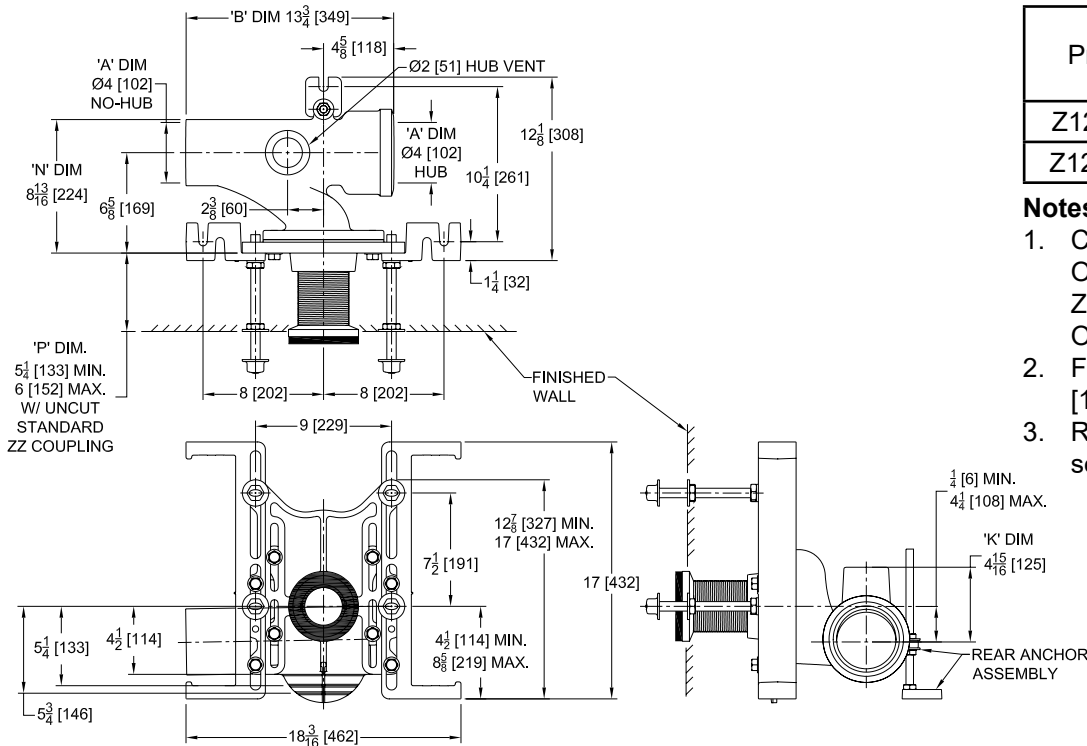

Product Number	Approx. Wt. lbs [kg]
Z1201-HL4-RYK17	63 [29]
Z1201-HR4-RYK17	

Notes:

1. Cut coupling, Min. 'P' Dim. Obtainable = 2 [51]
ZQ coupling, Minimum 'P' Dim. Obtainable = 5 [127]
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor assembly required for secure installation.

Z1201-HR4-RYK17 Illustrated

ENGINEERING SPECIFICATION: ZURN Z1201-H_4-RYK17

EZCarry® horizontal siphon jet water closet carrier system, with high performance waterway and 4" [102 mm] hub and spigot connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51 mm] vent, adjustable faceplate, QuickFit™ faceplate gasket, floor mounted 17" [432 mm] one piece RYK foot supports, heavy-duty 1/2" [13 mm] rear anchor tie down, fixture bolts, trim, and stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with all requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load rating.

OPTIONS (Check/specify appropriate options)

- ____ Z1201-HL4-RYK17 4 [102] Hub and Spigot Left Hand Inlet with Flow to Right
____ Z1201-HR4-RYK17 4 [102] Hub and Spigot Right Hand Inlet with Flow to Left

PREFIXES

- ____ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*
____ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- ____ -A Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])
____ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])
____ -CE EZ-Set™ Coupling (Available 6 [152], 12 [305] longer when specified, Minimum length = 5 [127])
____ -CL Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])
____ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap
____ -F Floor Mounted, Back Outlet Fixture Support
____ -G Galvanized Cast Iron
____ -M Auxiliary Foot Support (For 'P' Dim. 10 thru 18 [254 thru 457])
____ -VP Vandal-Proof Trim
____ -45 Finishing Frame for Siphon Jet System
____ -50 Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. A Page 1 of 1
Date: 07/23/24
C.N. No. 146098
Patent zurn.com/patents
Prod. | Dwg. No. Z1201-H_4-RYK17