

**Z1201-N\_3-RYK17**

17 [432] ONE PIECE RYK FOOT SUPPORT


EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE

SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG \_\_\_\_\_

Design and Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

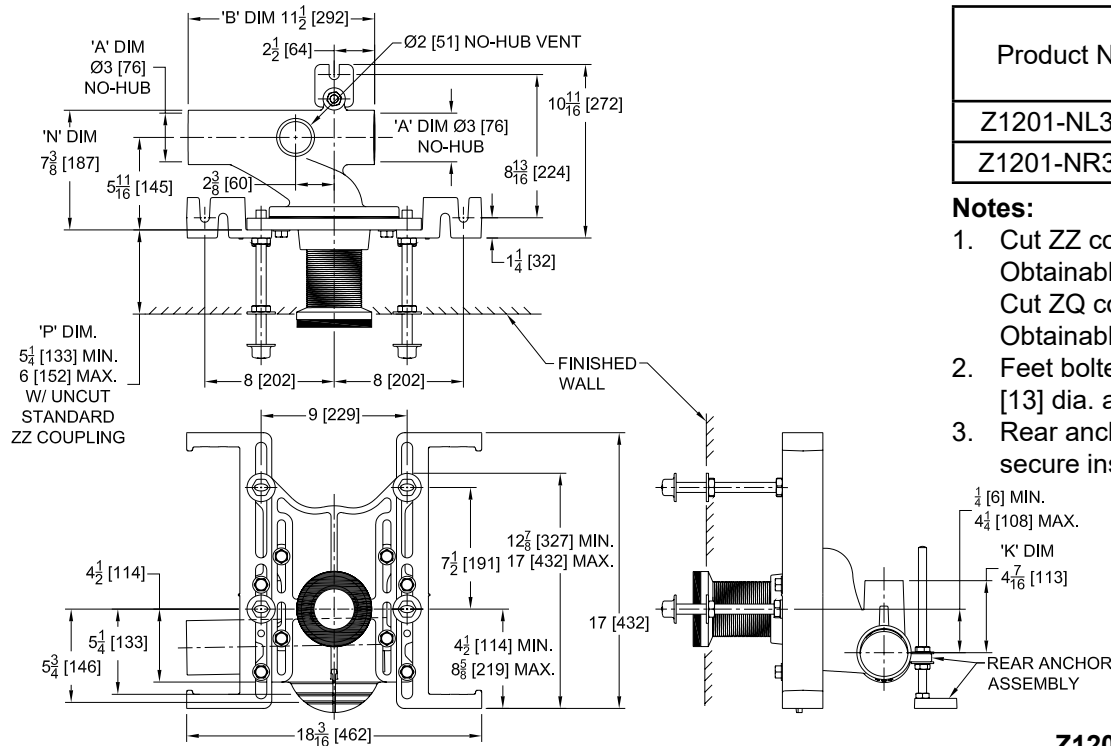

| Product Number  | Approx. Wt. lbs [kg] |
|-----------------|----------------------|
| Z1201-NL3-RYK17 | 55 [25]              |
| Z1201-NR3-RYK17 |                      |

**Notes:**

1. Cut ZZ coupling, Min. 'P' Dim. Obtainable = 2 [51]  
Cut ZQ coupling, Min. 'P' Dim. Obtainable = 5 [127]
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor assembly required for secure installation.

**Z1201-NR3-RYK17 Illustrated****ENGINEERING SPECIFICATION: ZURN Z1201-N\_3-RYK17**

EZCarry® horizontal siphon jet water closet carrier system, with high performance waterway and 3" [76 mm] no-hub connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51 mm] vent, adjustable faceplate, QuickFit™ faceplate gasket, floor mounted 17" [432 mm] one piece RYK foot supports, heavy-duty 1/2" [13 mm] rear anchor tie down, fixture bolts, trim, and stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with all requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load rating.

**OPTIONS** (Check/specify appropriate options)

- \_\_\_\_ Z1201-NL3-RYK17 3 [76] No-Hub Left Hand Inlet with Flow to Right  
\_\_\_\_ Z1201-NR3-RYK17 3 [76] No-Hub Right Hand Inlet with Flow to Left

**PREFIXES**

- \_\_\_\_ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling\*  
\_\_\_\_ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

**SUFFIXES**

- \_\_\_\_ -A Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])  
\_\_\_\_ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])  
\_\_\_\_ -CE EZ-Set™ Coupling (NPSM 6 [152], 12 [305] longer when specified, Minimum length = 5 [127])  
\_\_\_\_ -CL Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])  
\_\_\_\_ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap  
\_\_\_\_ -F Floor Mounted, Back Outlet Fixture Support  
\_\_\_\_ -G Galvanized Cast Iron  
\_\_\_\_ -M Auxiliary Foot Support (For 'P' Dim. 10 thru 18 [254 thru 457])  
\_\_\_\_ -VP Vandal-Proof Trim  
\_\_\_\_ -45 Finishing Frame for Siphon Jet System  
\_\_\_\_ -50 Flush Valve Supply Support for Water Closets

\* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited  
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

[www.zurn.com](http://www.zurn.com)

Rev. B Page 1 of 1  
Date: 07/23/24  
C.N. No. 146098  
Patent [zurn.com/patents](http://zurn.com/patents)  
Prod. | Dwg. No. Z1201-N\_3-RYK17